



**VALCO ELECTRONICS DISTRIBUTORS
2450 WEST LAUREL AVE
EUNICE LA 70535**

1-800-673-2244 FAX(337)546-0095

To All Our Valued Customers

For over 30 years Valco Distributors has been serving the electronics community with quality electronics at prices that don't cut into your profits. During these years we have made a lot of friends. To our existing customers, many thanks for your continued support. To those who have yet to depend on Valco, we welcome the opportunity to be of service to you.

Personal Attention

Our sales department is only a phone call away to help you. Our service department takes care of all warranty work on every item we sell, normally with a 48 hr. turn around service. With our experienced staff over 20,000 sq. ft. of inventory, commitment to service and customer satisfaction, your orders will receive prompt, personal attention.

Dedication to Service

Like most of you, Valco Distributors is owner operated. You can depend on us for high quality products and customer satisfaction, as well as innovative and new products. Our inventory is constantly changing with new items.

Catalog

Our catalog is constantly changing. We have provided you with a binder to easily add and remove pages. As products change we will send you updated sheets and information. Pricing listed may change without notice, for current pricing please call 1-800-673-2244.

Same Day Shipping No Minimum Orders



**Contents:**

Page	Contents
3-4	CB Radios Cobra, Mics, External Speakers
5-6	CB Radios Midland & Uniden
7-10	CB Antennas Wilson Francis JBC
11-14	CB Mounts & Accessories ProComm/JBC
15-17	Marine VHF Fixed Mount & Handheld Radios
18-20	Uniden Scanners & Accessories
21-22	TV HD Antennas and Accessories UHF VHF
23-24	Fuses and Fuse Holders
25-27	Audio Cables/Adapters
29-31	Power Supplies & Inverters
32-34	Pyle Car Audio Receivers CD MP3
35-36	Pyle Car Audio Speakers & Tweeters
37-38	Oregon Scientific
39	Headphones
40	Telephone Accessories
41	Docking Stations iPod iPhone
42	Cables Adapters iPod iPhone Computer





Cobra CB Radios



SoundTracker® Weather
10 NOAA Weather Ch.
Dual Watch and Scan
Instant Channels 9 & 19
Front-firing Speaker
Includes:
Microphone
Mounting Bracket
Power Cord
C18WXST II



Compact CB Radio
Compact 40 Channel
Instant Channel 9 and 19
RF Gain
Illuminated LCD Display
C19DXIV



40 CB Channels
Classic Chrome Styling
Full RF Power Output
RF Gain Control
Dynamike Gain Control
C25LTD



25LTD Classic with
NightWatch®
40 CB Channels
NightWatch® Illuminated
Display
Full RF Power Output
RF Gain Control
Dimmer Control
C25NW



25LTD Classic with
Weather, Night Watch
and Sound Tracker
40 CB Channels
NOAA Weather Channels
with Alert
NightWatch® Illuminated
Display
SoundTracker®
Noise Reduction System
Variable Dimmer Control
C25WXNWST



40 CB Channels
Full RF Power Output
SWR Calibration
Antenna Warning Indicator
RF Gain Control
C29LTD



29LTD Classic with Night
Watch.
40 Channel CB Radio
NightWatch® Illuminated
Display
SWR Calibration
Antenna Warning Indicator
Full RF Power Output
C29NW



29LTD Classic CB with
NOAA Weather and
NightWatch 40 CB Channels
NOAA Weather Channels
& Alert NightWatch®
Illuminated Display
SWR Calibration
Full RF Power Output
C29WXNWST



The World's Most Advanced
CB Radio
Selectable 4 Color LCD Display
Digital Frequency Display
Radio Check Diagnostic
10 Channel NOAA Weather
Radio Receiver
One Touch Channel Scan
Clock/Timer /Alarm - SWR
Calibration- Antenna Warning
Indicator
TalkBack - Instant Channel
C29LX



Compact/Remote Mount
CB
SoundTracker®
Dual Watch
10 Weather Channels
40 CB Channels
LCD Display
Instant Channel 19
Remote Mount System
Full Channel Scan
C75WXST



Auxiliary connector box
allows you to use your
C75WXST Compact CB
Radio in multiple vehicles
even in your boat
AC701



29 LTD Classic with Bluetooth®
Wireless Technology
One-Touch Bluetooth Wireless
Auto Redial
4 Watts AM RF Power Output
Talk Back
Blue Channel Indicator
C29LTDBT





Hand Held CB Radio
with Weather &
SoundTracker
Dual Watch
10 Weather Ch.
4 Watts Pwr.
Full Ch Scan
Speaker Mic Jack
DC Pwr Cord Included
HH38WXST



Same as HH38WXST
Includes Magnetic Mount
CB Antenna for better
reception & transmission.
HH38WXSTRT

Full Line Cobra Uniden Midland
Distributor.

Complete line of Radio and
Antenna Accessories.

We are only a phone call away
and will be happy to assist you

1-800-673-2244

Cobra Microphones



HG M73- Standard
4-pin Mic.



HG M75- 4-pin Power
Mic.

HG M77- 4-pin Noise
canceling Mic



HGM84- Premium
4-pin Mic.



CAM29BT- Re-
placement Mic for
C29 BlueTooth
Radios 6-Pin

External Speakers



Extension Speaker
15 Watt Power Handling
Capability
4-Inch Speaker with 5.5 oz
Magnet
Shock-resistant construction
Black Metal Mesh Grille
180-Degree Ratcheted
Swivel Mounted Bracket
HGS100



Extension Speaker with
Noise Filter
Same features as HGS100
plus Noise Filter
HGS300



Extension Speaker with
Talkback Same features
as HGS100 plus Talkback
HGS500

* Prices Subject to change without Notice



40 Channel Compact Mobile
CB Radio
4-Watts of power
Emergency channel
Digital power Signal
Strength meter
CB/PA switch
Squelch control
Lock-in microphone
connector
External speaker and
PA speaker jacks
1001Z



40 Channel CB Radio
Xtra Talk Mic Gain
RF Gain Control
Auto. Noise Limiter
Switchable Noise
Blanker
External speaker and
PA
Dimmer Switch
Instant Ch. 9
Squelch Control
5001Z



40 Ch. Handheld CB Radio
Rugged Construction
HI/LO Power
Great for RV'ers
4 Watts Output Power
Built in Automatic Noise
Control
75785



40 Channel Compact
Handheld CB Radio
Plug and Play Functionality
Easily Changes from a
Mobile to a Portable
Instant Channel 9 Access
4 Watts Output Power
5 Memory Channels
NOAA Weather Radio
HI/LO Power
75822



Headset With Boom Mic
for Midland CB Radios
Rugged headset with
adjustable band
Switchable PTT/ Vox
function
22540

Uniden CB Radios



Pro Series with Dynamic
Squelch Control
40 Channel Operation
Dynamic Squelch Control
RF Gain Control
Mic Gain Control
Channel Indicator
PA/CB Switch
Analog S/RF meter
Instant Channel 9
PC68XL



Pro Series 40 Ch CB Radio
with Weather Alert
Dynamic Squelch Control
RF Gain Control
Mic Gain Control
Backlit Control Knobs
Channel Indicator
PA/CB Switch
7 Weather Channels
Weather Alert
PC68LTW



Pro Series with Ergonomic
Pistol Grip Mic
40 Channel Operation
Dynamic Squelch Control
Enhanced Night Vision
Display Dimmer Control
RF Gain Control
Mic Gain Control
PA/CB Switch
7 Weather Channels
Backlit Control Knobs
PC68ELITE



Pro Series with Dynamic
Squelch Control
40 Channel Operation
RF Gain Control
Mic Gain Control
PA/CB Switch
Channel Indicator
Analog S/RF/SWR/
Mod Meter
Delta Tune
Instant Channel 9
PC78XL

* Prices Subject to change without Notice



Pro Series 40 Ch CB Radio with Weather Alert
 Dynamic Squelch Control
 Weather Alert
 Delta Tune
 RF Gain Control
 Mic Gain Control
 Backlit Control
 Channel Indicator
 PA/CB Switch
 Analog S/Rf/SWR/Mod Meter
PC78LTW



Pro Series with Ergonomic Pistol Grip Mic
 Dynamic Squelch Control
 Delta Tune
 Enhanced Night Vision
 Display Dimmer Control
 RF Gain Control
 Mic Gain Control
 Channel Indicator
 PA/CB Switch
 Analog S/Rf/SWR Meter
PC78ELITE



40 Ch Compact Mobile CB Radio
 ANL Switch
 Compact Size
 Full 40 Channel Operation
 S/Rf Meter
PRO510XL



Uniden Pro Series 40 Channel CB Radio
 40 Channel CB Radio
 Public Address Function (PA). Connect to an external PA speaker for amplified announcements
 Instant Channel 9 Quickly set the scanner to emergency channel 9
 External Speaker Jack Play an external speaker for better sound.
 Signal/RF Power Indicator. Check the relative strength of the incoming transmissions.
PRO505XL



Compact Professional Mobile CB Radio
 ANL Switch
 Compact Size
 Instant Channel 9
 PA/CB Switch
 RF Gain
 Full 40 Ch Operation
 S/Rf Meter
PRO520XL



Pro 40 Ch Mobile CB Radio with Weather Alert
 Front Fire Speaker
 Instant Channel 9
 NOAA Weather Ch
 PA/CB Switch
 RF Gain
 S/Rf Meter
PRO538W



Uniden Pro Series 40 Ch CB Radio
 Large Easy to Read Display
 Dynamic Squelch
 Mic Gain Hi Low
 PA/CB, Large Digital S/Rf Meter
 Backlit Controls
 Wireless Mic Capable (Available 2012)
 ANL/Noise Blanking
 Extra Long Mic Cord
Bearcat 680



Uniden Pro Series 40 Ch CB Radio
 Large Easy to Read Display
 Dynamic Squelch
 Mic Gain Hi Low
 PA/CB, Large Digital S/Rf Meter
 Backlit Controls
 Wireless Mic Capable (Available 2012)
 ANL/Noise Blanking
 Extra Long Mic Cord
 NOAA Weather Channels
 Memory Scan, Radio Diagnostics
 Variable Talk Back
 7 Display Color Options
Bearcat 880

* Prices Subject to change without Notice



ProComm/Workman Products

Base Load CB Antennas



Base Load Tuneable
CB Antenna
Field Tunable for
Lowest SWR
Rated 350 Watts
17-7 Stainless Steel
Whip
Fits Standard 3/8 24
Mounts
Factory Tested & Tuned
IMP3000 30" Whip
IMP4000 40" Whip



Kwik Tune Base Load
Tunable CB Antenna
Base Loaded Pre Tuned
for 27MHZ
Unique High Perfor-
mance Design for Low
SWR
Field Tunable
No Cutting
Adjust Rings
Chrome Plated 3/8 24
Threads
JBC800-8"
JBC2400-24"
JBC3600-36"
JBC4800-48"



Half-N-Half Base
Loaded 1/4 Wave
5/16 Dia. Fiberglass
Base with 16 Ga.
Copper Wire
17-7 .100 Dia. Stainless
Steel Whip
Whip can be Raised or
Lowered for Superior
SWR
Chrome Plated 3/8 24
Threaded Base
JBC1300-36"
JBC1400-48"
JBC1500-60"


Magnetic Mount Antennas



Heavy Duty CB
Magnet Mount
36" Base Loaded
Antenna
Powerful 3" Magnet
with Protective Base
17' Pre Wired High
Quality Coax Cable
with PL259
Rated 75 Watts
PC36
PC36S (Spring)




Workman
VMT24-24"
Magnet Mount Antenna
9" Super Flexible CB Ant.
Powerful 3" Magnet with
Protective Base
10' Low Loss High
Quality Coax Cable
with PL259.
Weatherproof
Encapsulated
Connections
Rated 25 Watts
JBC101
JBC101W Repl. Whip



CB Low Profile Magnet
Mount
15" Low Profile Fiberglass
CB Antenna
Base Tunable
Powerful 3" Magnet
12' High Quality Coax
Cable with PL259
Rated 75 Watts
CB270

No Ground CB Antennas



Dingo CB No Ground
Fiberglass Antenna
Kit
5/16" Fiberglass Tunable
Tip Antenna
Stainless Steel Mirror
Mount
Patented Chrome Dome
Cable Connection
17' High Quality Coax
with PL259
Kits available with 3' or
4' Antenna Length
Available in Black, White,
or Red
CBNG3 3' Kits
CBNG4 4' Kits




Dingoll No Ground
Window Clip Antenna
Kit
24" Mini Base Load
Antenna
Aluminum Window
Clip Mount
Patented Chrome
Dome Cable Connec-
tor
17' High Quality Coax
Cable with PL259
Available in Black or
White
CBNGWC17




Heavy Duty Rubber Duck Antenna
Virtually Unbreakable Conductive
Rubber CB Antenna
Flexible and Tough, Great for High
Stress Areas
14 1/2" Total Height
Easy Tuning with Base Tuning Ring
Standard 3/8 24 Ferrule
3" Heavy Duty Chrome Dome
Magnet
12' Coax Cable with PL259
JBC150M Kit
JBC150 Antenna Only




Fiberglass CB Antennas




Bull Dog Series
 5/16" Fiberglass Whips
 Rated at 750 Watts
 Top Loaded 1/4 Wave
 Helically Wound
 20 Gauge Copper
 Wire
 Factory Tuned Field
 Adjustable
 Available in Black, Red
 or White
JBC200-24"
JBC300-36"
JBC400-48"



Super Dog
 1/4" Flexi Whips
 Rated at 500 Watts
 Top Loaded 1/4 Wave
 Helically Wound
 20 Gauge Copper Wire
 Factory Tuned Field
 Adjustable
 Available in Black, Red or
 White
JBCF200-24"
JBCF300-36"
JBCF400-48"



Bull Dog
 Tunable Tip Antenna
 with Weatherband
 5/16" Fiberglass
 Whips Rated at 750
 Watts
 Top Loaded 1/4
 Wave Helically
 Wound with Tunable
 Tip
 20 Gauge Copper
 Wire
 .100 dia 17-7
 Tuneable Tip
 Available in Black or
 White
JBCWT300-36"
JBCWT400-48"



Workman
 PreTuned Fiberglass
 CB Antennas
 1000 Watts Helically
 Wound
 20 Gauge Copper
 Wire
 Factory Tuned Field
 Adjustable
 Available Black, Red
 or White
FW2-24"
FW3-36"
FW4-48"



Standard Single Antenna Kits
 Kit Includes:
 3 Way Aluminum Mirror Mount
 Heavy Duty Chrome Plated
 SO239
 9' Low Loss High Quality Coax
 Cable with PL259.
 Available in 2 3 and 4 Ft Kits
 Black White or Red
HSS995-2 24" Kit
HS995-3 36" Kit
HSS995-4 48" Kit

Workman
 FWRV13- 36" Kit
 Black or White



Standard Dual Antenna Kits
 Kit Includes:
 Two 3 Way Aluminum Mirror
 Mount
 Two Heavy Duty Chrome Plated
 SO239
 9' Low Loss High Quality Dual
 Coax
 Cable with PL259.
 Available in 2 3 and 4 Ft Kits
 Black White or Red
HSD995-2 24" Kit
HSD995-3 36" Kit
HSD995-4 48" Kit

Glass Mount CB Antennas



Standard Single Antenna Kits
 Kit Includes:
 3 Way Aluminum Mirror Mount
 Heavy Duty Chrome Plated
 SO239
 9' Low Loss High Quality Coax
 Cable with PL259.
 Available in 2 3 and 4 Ft Kits
 Black White or Red
HSS995-2 24" Kit
HS995-3 36" Kit
HSS995-4 48" Kit



Vector High Performance
 On Glass CB Antenna
 Tuning Collar makes tuning
 easier than ever
 Optimized Removable 1/2
 Wave Fiberglass Whip
 16' High Quality Coax Cable
 with PL259
 Rated at 50 Watts
VCBGM



Standard On Glass CB
 Antenna Kit
 22" Collinear Antenna
 Center Load Encapsulated
 in Flexible Plastic
 Easy Installation
 Freq: 25-30Mhz
 15' High Quality Coax
 Cable with PL259
CBG22



"Silver" Load FGT Series
 3/8" Dia. Fiberglass
 Standard 3/8"X24 Chromed
 Brass Ferrule
 Fully linear Top Loaded for
 Maximum Transfer of Power
 Design incorporates an 18
 Ga. "Silver Plated" Copper
 Wire to Provide
 Higher Efficiency
 Antenna has Unique
 Ground Lead to Help Insure
 Reduced Static Ignition
 Interference
 Static Reducing Weather
 Cap.
 Available in 2, 3, 4 or 5 Foot
 Lengths

FGT2 2 Foot
305-480 Black
305-481 Red
305-482 White

FGT3 3 Foot
305-483 Black
305-484 Red
305-485 White

FGT4 4 Foot
305-486 Black
305-487 Red
305-488 White

FGT5 5 Foot
305-489 Black
305-490 Red
305-491 White



Flex Silver Load Whip
 200 Watt Antenna Whip
 1/4" Dia. Tapered Fiberglass
 Construction
 Chromed Brass Ferrule &
 Standard 3/8"X24
 Threads
 Design Incorporates 22
 Ga. "Silver Plated" Wire to
 Provide Higher Efficiency
 The "Tunable Tip" Allows
 for Fine Tuning SWR
 Unique Ground Lead to
 Help Insure Reduced
 Static & Ignition Interfer-
 ence
 Static Reducing Weather
 Cap
305-3FD
 3 Foot Length
305-4FD
 4 Foot Length



1000 Series CB Antenna
 3000 Watt Power Handling Capability
 Freq Range 26Mhz to 30 Mhz
 Made with High Impact Thermoplastic
 Heavy Duty Coil Uses 10 Ga. Copper
 Wire
 62" 17-7 PH Stainless Steel Whip
 Removable Coil for Sage Storage &
 Garage Entrance
 Weather Channel Ready
880-900800B Magnet Mount
880-900802B Roof Top Mount
880-900803B Trunk Lip Mount
880-900901 61" Repl. Whip
880-900906 66" Whip



"Little Wil" Magnet Mount
 Antenna
 Large 10oz Magnet
 300 Watts Power Han-
 dling Capability
 Made with High Impact
 Thermoplastic
 Heavy Duty Coil uses 14
 Ga. Copper Wire
 Low Loss Coil Design
 36" 17-7 PH Stainless
 Steel Whip
305-38
880-300122 Repl. Whip



500 Series CB & Amateur
 Antenna 10 & 11 Meter
 200 Watt Power Handling
 Capability
 Made with High Impact
 Thermoplastic
 Heavy Duty Coil Uses 12
 Ga. Copper Wire
 Exclusive Low Loss Coil
 Design
 54" 17-7 PH Stainless
 Steel Whip
 Freq. Range 26Mhz to 30
 Mhz
 Weather Channel Ready
880-500100
880-500106 Rep. Whip



5000 Series CB Antenna
 5000 Watt AM 20000 SSB Power
 Handling Capability
 Freq Range 26Mhz to 30 Mhz
 Made with High Impact Thermo-
 plastic
 62" 17-7 PH Stainless Steel Whip
 Removable Coil for Sage Storage
 & Garage Entrance
 Weather Channel Ready
880-200152B Magnet Mount
880-200153B Trunk Lip Mount
880-200154B Roof Top Mount
880-900901 61" Repl. Whip
880-900906 66" Whip

Trucker Series



2000 Trucker Series
49" Stainless Steel Whip
Rated at 3500 Watts
Standard 3/8 X 24
Chromed Brass Ferrule
Larger Coil Housing
Allows for Increased
Power Handling
Patented Low Loss Air
Wound Coil Design
Uses 10 Ga. Silver Plated
Wire

Coil is made of High
Impact Engineered
Thermoplastic
Freq Range 26Mhz to
30Mhz

Available in following
Shaft Sizes

5" Shaft

305-492 Black
305-494 White

10" Shaft

305-495 Black
305-496 Red
305-497 White

18" Shaft

305-498 White
SW2000BL Blue
SW2000RD Red



5000 Series CB Antenna
5000 Watt AM 20000 SSB
Power Handling Capability
Freq Range 26Mhz to 30
Mhz
Made with High Impact
Thermoplastic
62" 17-7 PH Stainless
Steel Whip
Removable Coil for Sage
Storage & Garage En-
trance
Weather Channel Ready
49" Stainless Steel Whip
5" Shaft
305-555



Replacement Shafts for
Wilson Trucker Antennas

305-5 5" Shaft
305-10 10" Shaft



Replacement Whips for
Wilson

880-900905 49" 2000-5000
880-500100 54" W500
880-900902 61" W1000-5000
880-900906 66" W1000-5000



FRANCIS Hot Rod Series Antennas
Double Quarter Wave
Continuous Load
Standard 3/8" X 24 Chromed
Brass Ferrule
Traditional Sleek Style Reduces
Wind Drag Load
Each Antenna is Tuned for Maxi-
mum Performance
Exclusive Double Helical Windings
Winding Sealed inside Fiberglass
for Long Life and Durability
Custom Fiberglass Formula for a
Flexible Long Lasting Antenna

300-CB22B 3' Black
300-CB22O 3' Orange
300-CB22W 3' White

300-CB24B 4' Black
300-CB24O 4' Orange
300-CB24W 4' White

300-CB25B 4.5' Black
300-CB25O 4.5' Orange
300-CB25W 4.5' White

300-CB26B 5.5' Black
300-CB26O 5.5' Orange
300-CB26W 5.5' White

Amature Antenna



2 Meter Amateur Antenna
144-148 Mhz
5/8 Wave Length
Heavy Duty Coil
14 Ga Wire
47" Stainless Steel Whip
500 Watt Power Rating
Large 10 oz. Magnet
880-300200B

ProComm Microphones



Standard 4-pin Replacement Dynamic CB mic with 4-Pin Connector.
PSM4

Standard 4-pin Replacement Dynamic Noise Cancelling CB mic with 4-pin Connector
PSM4NC

Standard 4-pin Replacement Dynamic Power CB mic with 4-pin Connector
PSM4PM



Workman
Standard 4-pin Replacement Dynamic CB mic with 4-Pin Connector.
CM4

Standard 5-pin Replacement Dynamic CB mic with 5-pin Connector
PSM5

Standard 5-pin Replacement Dynamic Noise Cancelling CB mic with 5-pin Connector
PSM5NC

Standard 5-pin Replacement Dynamic Power CB mic with 5-pin Connector
PSM5PM

CB Radio Accessories



2 Pin CB Power Cords
JBCPC2 2 Pin Molded Plug. 20 Ga with 2 Amp Fuse

JBCPC2P 2 Pin Molded Plug. 20 Ga with 2 Amp Fuse & Cig. Plug



3 Pin CB Power Cords
JBCPC3H 3 Pin Molded Plug. 16 Ga. with 3 Amp Fuse

JBCPC3PH 3 Pin Molded Plug. 16 Ga with 3 Amp Fuse & Cig. Plug



RT44112
Gear Keeper Retracting Tether suspends mic from headliner
Nylon Coated Stainless Steel Cable
9 oz. Retraction Force 23" Extension
60 lbs. Breaking Strength
Locks in any Position

RT34112
Gear Keeper Retracting Tether suspends mic from headliner
Nylon Coated Stainless Steel Cable
12 oz. Retraction Force 42" Extension
80 lbs. Breaking Strength
Locks in any Position



3 Finger CB Microphone Holder
JBCMh2



Plastic Buddy Hook CB Microphone Holder
JBCMh4



Metal Buddy Hook CB Microphone Holder
JBCMh5



Universal Radio Hump Mount
JBC1000



Hook N Loop Adhesive 2"x6" Strip
VEL26



JBC Plastic Radio Replacement Knobs
JBC4KNP 4MM
JBC5KNP 5MM
JBC6KNP 6MM



Adjustable Radio Mounting Bracket with Quick Release 2"-9.5"
JBC1250



Large Adjustable Radio Bracket for Wide Body Radios 4"-13"
JBC1200L

* Prices Subject to change without Notice

External Speakers



4" 8 Ohm 10 Watt
External Speaker
10' Cord
3.5MM Plug
Swivel Mounting Base
JBCSP1



External Speaker
with TalkBack
& Noise Canceling
4" 8 Ohm 10 Watt
External Speaker
with 10' Cord.
3.5mm Plug and
Swivel Mounting
Base.
JBCSP3



Mini Ext. CB Speaker
2 1/4"-8 OHM 5 Watt
Weatherproof External
Speaker
6' Cord
3.5MM Plug
Swivel Mounting Bracket
JBCSP5



Attractive Wedge Style
External Speaker
Weatherproof
8 Ohm Impedance
Complete with
Mounting Hardware
JBCSP8

Coax Assemblies



JBC Standard "HI SPEC"
Coax Assemblies RG58
Stranded Coax
Molded Plug to Plug
HS803PL 3 ft
HS806PL 6 ft
HS809PL 9ft
HS8012PL 12 ft
HS818PL 18 ft



JBC Standard "HI SPEC"
Coax Assemblies RG8X
Mini 8 Coax
Molded Plug to Plug
PR3-8X 3 ft
PR6-8X 6 ft
PR9-8X 9 ft
PR12-8X 12 ft
PR18-8X 18 ft

Workman

8X-3PL 3 ft
8X-6PL 6 ft
8X-9PL 9 ft
8X-12PL 12 ft
8X-18PL 18 ft



JBC Standard "HI SPEC"
Coax Assemblies RG58
Stranded Coax
Molded Plug to Lug
HS809PL 9 ft
HS812PL 12 ft
HS818PL 18 ft



JBC Standard "HI SPEC"
Coax Assemblies RG58
Dual Coax
Molded Plug to Plug
HSDH9P 9 ft
HSDH12P 12 ft
HSDH18P 18 ft

Antenna Mounts



Heavy Duty
Stud Connector
JBC900
JBC901



Standard Non
Corrosive Brass
SO239
JBC910



Heavy Duty
Non Corrosive
Chrome Plated
Brass SO239
JBC910H



Heavy Duty
FME Stud
JBC920



Extra Heavy
Duty SO239
for Big Antenna
Systems
JBC930

* Prices Subject to change without Notice

Antenna Mounts



1 1/8" Omni Grip Mirror Mount
JBC530 with Stud
JBC531 Mount Only



Deluxe 3 Way Mirror Mount
JBC995 HD SO239
JBC990 with Stud
JBC991 Mount Only



Heavy Duty Double Groove Mirror Mount
JBC995H HD SO239
JBC990H with Stud
JBC991H Mount Only



Slimline Mirror Mount
JBC362 HD SO239
JBC363 with Stud
JBC361 Mount Only

1 1/4" Omni Grip Mirror Mount
JBC545 HD SO239
JBC540 with Stud
JBC541 Mount Only



360 Degree Adjustable Bar Mirror Mount
JBC592 HD SO239
JBC593 with Stud
JBC951 Mount Only



180 Degree Adjustable Bar Mount
JBC492 HD SO239
JBC493 with Stud
JBC491 Mount Only



Extra Heavy Duty 3 Way Mirror Mount for Big Antenna Systems
JBC935 Double groove SO239
JBC935H Heavy Duty Double Groove SO239



Heavy Duty Slimline Mirror Mount
JBC362H HD SO239
JBC363H with Stud
JBC361H Mount Only



Heavy Duty Bumper Mount
JBC482 HD SO239
JBC483 with Stud
JBC481 Mount Only



6" Standard Flat Bar Mount
JBC436 HD SO239
JBC437 with Stud
JBC435 Mount Only



6" Horizontal Mirror Mount
JBC332 HD SO239
JBC333 with Stud
JBC331 Mount Only



Dual Antenna Aluminum Mirror Mount
JBC440 2 HD SO239's
JBC441 2 Stud's
JBC443 Mount Only



Ford Flat Bar Mount
JBC338 HD SO239
JBC337 with Stud
JBC336 Mount Only



4" Horizontal Mirror Mount
JBC332S HD SO239
JBC333S with Stud
JBC331S Mount Only



3" Short Heavy Duty Mirror Mount
JBC332SH HD SO239
JBC333SH with Stud
JBC331SH Mount Only

* Prices Subject to change without Notice

Antenna Mounts



Quick Release Hinge Mount
JBC830 HD SO239
JBC831 with Stud
JBC833 Mount Only



Quick Release Vise Grip Mount
JBC955 HD SO239
JBC951 Mount Only



Standard Fender Mount
JBC472 HD SO239
JBC473 with Stud
JBC471 Mount Only



Heavy Duty Surface Mount with SO239 and Star Locking Washer
JBC989
Workman
HDM1



Heavy Duty Ball Mount with 3 Hole 1/2" Black Mounting Plate and Barrel Spring
JBC986



Heavy Duty Ball Mount with 3 1/2" Black Mounting Plate
JBC985-3 (Lug)
JBC985-3P (Plug)



Heavy Duty Surface Mount Lug Termination
JBC504



Heavy Duty Magnet Mount Chrome Plated Housing Standard 3/8 24 Mounting 18' High Quality Coax Cable with PL259
JBC110 3" Magnet
JBC115 5" Magnet



Medium Duty Stainless Steel 4" Spring
JBC403
Workman
S30
Barjan
360-53405



Heavy Duty Stainless Steel 5" Spring
JBC404
Barjan
360-53406



Heavy Duty Barrel Spring
JBC305
Barjan
300-53407



Heavy Duty Quick Disconnect Chrome Plated Brass Body Stainless Steel Spring & Pin
JBC201L



180 Degree Antenna Swivel
JBC100



Weatherproof Trunk Lip Mount
 Standard 3/8 24 Antenna High Quality Coax Cable with PL259
JBC105



Heavy Duty Fender Mount Chrome Plated Double Hex Nut Weatherproof Terminator Connector
 18' High Quality RG58 Cable with Nipple Connector to PL259
JBC472C

* Prices Subject to change without Notice



JIS4/CFR46 Waterproof Level
 1 Watt/5 Watt Switchable
 NiMH and Alkaline Battery Capability
 Instant Channel 16/9/Triple Watch
 All N.O.A.A. Weather Channels with
 Weather Alert
 Backlit LCD Display
 Memory Channel Scan
 Optional Speaker/Microphone
 Flexible Rubber Antenna
 Available in Black Or White
Atlantis 250



JIS8 Submersible
 Compact Size
 Dual Triple and Quad Watch
 Plus Rapid Clip-On DC Charger
 Selectable 1Watt/2.5/5 Transmit
 Pwr All N.O.A.A. Weather
 Channels with Weather Alert
 Memory Channel Scan
 Large Easy-To-Read LCD Screen
 Up to 12 Hour Battery Life
 All USA/International and
 Canadian Marine Channels
 SMA Flexible Rubber Antenna
 A sturdy belt clip is included for
 maximum mobility
MHS75



All USA/International/Canadian Marine
 Channels
 1 Watt/25 Watt Transmit Power
 DSC (Digital Selective Calling)
 DSC Position Send and Request
 Ultra Compact Rugged Construction
 JIS7 Submersible
 Full Dot Matrix Display with Easy-to-Use
 Intuitive Menus
 Quik Command™ One-Touch Ch 16/9 Key
 on Mic
 S.A.M.E. Emergency/Weather Alert
 Channel Names
 Backlit LCD Display and Keypad
 Triple Watch Plus™
 Memory Scan
 Weather Alert
 Weather Scan
 Available in Black or White
UM415



25 Watt Full-Featured
 Fixed Mount VHF Marine Radio.
 All USA/International/Canadian
 Marine Channels
 DSC (Digital Selective Calling)
 DSC Position Send and Request
 Ultra Compact Rugged
 Construction JIS7 Submersible
 Full Dot Matrix Display
 Quik Command™
 Durable Rubber Grip Mic
 S.A.M.E. Emergency/Weather
 Alert
UM425Bk



Daylight Viewable Color
 TFT LCD Display
 Class D DSC Rated
 DSC Output
 30 Watt Loud Hailer
 Superior Radio Receiver
 GPS Intuitive
 GPS Repeatability
 WHAMx4 Capability
 Scrambler Capable
 Built-In Help Menu
 N.O.A.A. All Hazards
 Weather Alert (w/ S.A.M.E.)
 JIS7 Rated Completely
 Submersible
 Available in Black or Gray
UM625C

ICOM Marine Radios



IPX7 Submersible
Dual/Tri Watch
Large Display
Includes:
Flexible antenna
Swivel Belt Clip
Handstrap
Battery case
Ni-Cd Battery Pack
AC Adapter
Battery Charger
M2A ICOM



IPX7 Submersible
Li-Ion Battery &
Charger Standard
AquaQuake
Draining Function
Optional Speaker
Mic.
Includes:
Battery
Drop In Charger
AC Adapter
Flexible Antenna
Alligator Clip
M34 01 ICOM



IPX7 Submersible
6 Watt VHF
Clear Voice Audio
Boost
AquaQuake
Draining Function
Noise Cancelling
Microphone
Includes:
Battery
Drop In Charger
AC Adapter
Flexible Antenna
Alligator Clip
M36 01 ICOM



IPX 8 Submersible
6 Watt VHF
High Res. Display
Shorter Antenna
Large Display with
Backlit Keypad
70 Programmable
Ch.
Includes:
Battery
Drop In Charger
AC Adapter
Flexible Antenna
Alligator Clip
M72 01 ICOM



IPX7 Submersible
Dual/Tri Watch
Switchable Wide/
Narrow Ch Spacing
for Marine /
LMR Channels
(146-174MHz)
Includes:
Battery
Drop In Charger
AC Adapter
Flexible Antenna
Alligator Clip
M88 01 ICOM



IPX7 Submersible
Force5Audio Clear
NMEA Input for GPS
Built In DSC
Favorite Ch Function
AquaQuake Draining
Available In Black White
Gray
Includes:
Hand Microphone
Mounting Gimbal Bracket
DC Power Cord
M304 ICOM



Built In DSC
Individual Group &
All Ships Call
Position Request &
Report with 3rd Party
GPS
Submersible Construction
Built In Hailer
Force5Audio
Available In Black or
White
Includes:
Hand Microphone
Mounting Gimbal Bracket
DC Power Cord
M422 ICOM



IPX8 Waterproof
Large LCD Full Dot
Matrix
Class D DSC w
Second Independent
Receiver
Improved Bass Dynamics
for Better Quality
Tag Scan, Dual/Tri Watch
One Touch Weather and
More. Hailer & Auto
Foghorn Functions
25 Watts
Available in Black or
Gray
Includes:
Speaker Microphone
Mounting Gimbal Bracket
DC Power Cord
M504 ICOM



IP7X Submersible Water-
proof
Built In Class D DSC
Favorite Ch Button
2-Way
30 W Hailer
RX Repeater & Fog Horn
Up to 2 Comman Mic III's
with Full Radio
Intergration
Available in Black or Gray

Includes:
Speaker Microphone
Mounting Gimbal Bracket
DC Power Cord
M604 ICOM

Cobra Marine Radios



Weather Alert
 Waterproof
 10 NOAA Channels
 1 or 3 Watts
 All 10 NOAA
 Weather Channels
 Noise Canceling
 Microphone with Con-
 trols Illuminated
 Function Keys
 Signal Strength Meter
 Speaker Microphone
 Jack
 Memory Scan
 USA, Canada and
 International Channels
MRHH125



Weather Alert
 1 or 5 Watts
 Submersible
 Battery Tray with
 Charge Contacts
 Tri-Watch
 Illuminated LCD
 Display
 Memory Scan
 USA, Canada and
 International Chan-
 nels
MRHH400XPV



GMRS
 All 10 NOAA/Weather
 Channels
 1, 3 or 5 Watts
 Speaker Microphone
 Jack
 Tri-Watch
 Illuminated LCD
 Display
 Scan, Keystroke Tone
 Signal
 USA, Canada and
 International Chan-
 nels
MRHH425LIVP



Weather Alert
 DSC (Digital Selective Calling)
 1 or 25 Watts
 All 10 NOAA/Weather Chan-
 nels, Submersible, Noise
 Canceling Microphone with
 Controls, Public Address
 Tri-Watch, Illuminated LCD
 Display, GPS Capability,
 Memory Scan, External
 Speaker Jack
 USA, Canada and International
 Channels
MRF75



Floating Design and Orange Core
 makes Retrieving your radio easy if
 Dropped Overboard.
 Noise Canceling Microphone Blocks
 Background Noise for Clearer Con-
 versations
 Select Between 1 3 and 6 Watts for
 short and Long Range Communica-
 tions
 USA Canadian and International
 Channels
 All NOAA Weather Channels
 Weather Alert Audible Tone and
 Visual Alarm if Threatening Weather
 is Nearby
 Rated Submersible to Industry
 Standard JIS7 (IPX7)
 Includes Locking Desktop Charger
 with AC and DC Cig. Plug Adapter.
 Rechargeable Battery
MRHH330FLT

Hand Held Scanners



100 Channel Compact Handheld Scanner. Great for NASCAR!
 Compact Design
 Close Call™ RF Capture Technology
 Frequency Coverage 25-54,108-174,406-512
 10 Programmable Search Ranges
 6 Preprogrammed Service Searches
 Backlit Display, Priority Scan
 Sport Scanner
BC72XLT



200 Channel Handheld Scanner with 800MHz Coverage
 Compact Design
 Close Call RF Capture
 Frequency Coverage 25-54,108-174,406-512,806-956 (excluding cellular)
 10 Programmable Search Ranges
 6 Preprogrammed Service Searches
 Backlit Display, Priority Scan
 Sport Scanner, PC Programmable
BC95XLT



BC346XT Portable Compact Handheld Scanner
 TrunkTracker III
 9000 Dynamically Allocated Channels
 Location-Based Scanning
 Close Call™ RF Capture Technology
 Fire Tone-Out
 Frequency Coverage - 25-225, 400-512, 806-960, and 1240-1300 MHz (excluding cellular bands)
 Alpha Tagging
BC346XT



Compact APCO 25 Handheld Scanner
 TrunkTracker IV (Motorola APCO 25 Digital, Motorola, EDACS, LTR)
 25000 Dynamically Allocated Channels
 Close Call™ RF Capture Technology
 Location-Based Scanning
 Fire Tone-Out, Multi-Colored Display
 Backlight, Alpha Tagging, 100 Quick Key System Access, Band Scope
 Continuous Band Coverage - 25MHz to 1.3GHz Excluding UHF TV and Cellular
 Audio AGC, Automatic Digital Threshold Adjustment
 NAC Decoding, DCS/CTCSS Rapid Decode, S.A.M.E. Weather Alert System / Channel Number Tagging
BCD396XT



HomePatrol-1 lets you quickly hear the communications systems used by Public Safety, Aircraft Military Weather Spotters and More. Simply enter your zip code and HomePatrol-1 does the rest. Whether it is across town or across the street HomePatrol-1 keeps you informed
 Touchscreen Operation
 3.5" Daylight Viewable Display
 Radio System database is updated weekly.
 No Subscription Needed.
 TrunkTracker IV (Motorola APCO 25 Digital, Motorola, EDACS, LTR)
 Quick Record and Playback
 Instant Replay
New Item
HomePatrol 1



Bearcat Scanners

Base Mobile Scanners



CRS Clock Radio Base Scanner with 100 channels in 10 Banks
Service Search
Weather Scan
AM/FM Radio
Alarm Clock w/ Snooze
Public Safety Scanner
BC340CRS



CRS Clock Radio Base Scanner with 300 channels in 10 Banks
All Hazard Alert
Atomic Clock
Service Search
Weather Scan
AM/FM Radio
Alarm Clock w/ Snooze
25-54, 108-174, 225-380, 406-512, 806-956 MHz - (excluding cellular)
Public Safety Scanner
BC370CRS



800MHz Base / Mobile Scanner
300 Channels
Close Call™ RF Capture Technology
Preprogrammed Service Search
Backlit Display
100 ch/sec Scan Speed (max)
Frequency Coverage 25-54,108-174,406-512,806-956 (excluding cellular)
AC Adapters, DC Power Cable and Automotive Power Outlet Plug
BC355C



BearTracker™ Warning System with 800 MHz TrunkTracker III
250 User Programmable Memories
Frequency Coverage 25-54,108-174,400-512,806-956 (excluding cellular)
Preprogrammed Service Search
Preprogrammed Highway Patrol Frequencies by State
Backlit Display, 100 ch/sec Scan Speed (max)
Priority Operation
BCT8



Mobile BearTracker Scanner with 9,000 Channels and GPS Support
TrunkTracker III Technology
Location-Based Scanning
Close Call™ RF Capture Technology
Fire Tone-Out, Alpha Tagging
100 Quick Key System Access
Band Scope
Continuous Band Coverage - 25MHz to 1.3GHz Excluding UHF TV and Cellular
DCS/CTCSS Rapid Decode
S.A.M.E. Weather Alert
PC Programming/Control and More
BCT15X



Digital Mobile Scanner with 25,000 Channels and GPS Support
TrunkTracker IV (Motorola APCO 25 Digital, Motorola, EDACS, LTR)
Close Call™ RF Capture Technology
Continuous Band Coverage - 25MHz to 1.3GHz Excluding UHF TV and Cellular
Fire Tone-Out, Multi-Colored Display Backlight, Alpha Tagging
100 Quick Key System Access
Audio AGC
Automatic Digital Threshold Adjustment
NAC Decoding
DCS/CTCSS Rapid Decode
S.A.M.E. Weather Alert
PC Programming/Control System / Channel Number Tagging
BCD996XT




500 Channel Programmable Base / Mobile Scanner with TrunkTracker III
Frequency Coverage 25-54,108-174, 216-512, 806-956 (excluding cellular)
1000 Talk Group ID's in 10 Lists of 10 per Bank
DCS/CTCSS Rapid Decode
S.A.M.E. Weather Alert, Conventional and Trunked Search Operations
200 Talk Group Skip Memories
100 Search Skip Memories
BC898T



Outdoor Scanner Antennas



AntennaCraft
Scanner Antenna Kit
Includes 50' Coaxial Cable
and 300 to 75 Ohm Transformer
102" Vertical Height
15 Electronic Elements
Includes F to BNC adapter
ST2

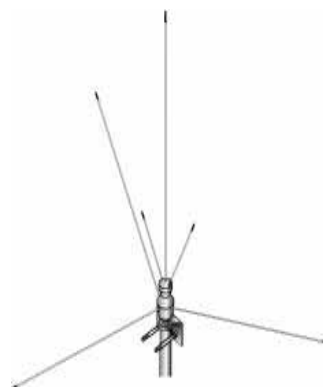

AntennaCraft
Outdoor Scanner Ant.
Covers 108-1300MHz;
Peak performance in the
52-470MHz range.
Approximately 20" in
height
Chrome plated brass
vertical element
Accepts PL-259 connec-
tor
ST3



AntennaCraft
Outdoor Scanner/Ham Discone
Antenna
Omni-directional Reception
25-1300MHz coverage
Stainless steel construction; 44" height
Also transmits on 50, 144, 220, 440, 900
and 1296MHz ham band
Resonator and tunable whip for 50MHz use
Fits mast up to 1.5" in diameter
Accepts PL-259 connector
ST4

Mobile Mount Scanner Antennas



ProComm Disguise Scanner
Glass Mount Antenna Kit
Multiband Receiving Ant.
22" 17-7 Stainless Steel
Whip
Covers Freq. Range 30-1200Mhz
Includes 15' RG58 Coax Cable
with BNC Connection
PCSGM/BNC



ProComm Magnetic
Mount Scanner Ant.
18" Stainless Steel
Freq. Range 25-960Mhz
3" Magnetic Mount
12' RG58 Coax with
BNC Connector
JBC180M3BNC



Replacement Scanner Antennas

9001 Standard Portable Rubber Duck Scanner
Antenna with BNC
ANT5 Stubby Portable Scanner Antenna with
BNC
9002BNC Standard Back Of Set Telescoping
Scanner Antenna with BNC



TV Antenna and Accessories




The Mini State 21" Diameter 7" Height Antenna System enhances digital channel searching. You can store channel positions with the RF remote, and later recall one of the channel memories for fast accurate channel surfing. HDTV Digital Ready. Ships ready to install.

HDMS9100



Omni State VHF UHF for close in and all around. 21" Diameter, 2" Height. AC/DC 20DB Amplifier. HDTV Digital Ready. Coax Cable not included.

HDMS921

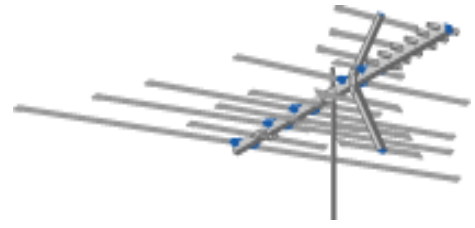

CCS VHF/UHF/FM Series Digital Ready

CCS1843 180" Boom, 54 Electronic Elements, CH2-69, Range up to 100 Miles VHF Low Band, 100 Miles VHF High Band, 60 Miles UHF

CCS1233 120" Boom, 39 Electronic Elements, Ch 2-69, Range up to 70 Miles VHF Low Band, 70 Miles VHF High Band, 30 Miles UHF




Premium Grade High Gain, Hi Input Level Capacity, Pre Amplifier, Internal RF Shielding, Split Band Amplification. Gain up to 16dB VHF 22dB UHF, Low Noise. Surface Mount Design, Switchable FM Trap, High Quality Transistors, 75 Ohm Input/output Mast Mounted, Indoor Power Supply with Power LED.

10G201



Gold, Corrosion-Resistant Coated Holds Masts Up to 2" Diameter Requires 3-Wire Rotator Cable UL Listed, AC Operation Fully Automatic, Heavy-Duty Motor Handles Large Antenna with Plenty of Torque to Break thru Heavy Ice Loads Strong, Machine-Cut Gears that Won't Bind, Brake Pads Hold Firm to Prevent High Wind Damage (Tested to 70MPH), 2 Synchronized Motors give Exact Degree of Station Location, Rotor can be used with any 3 or 4 Element HF 10/11 Meter Beam or 6 or 8 2 Meter or 6 Meter Beam

TDP2



ColorKing VHF/UHF/FM Series Digital Ready

5884 58" Boom, 25 Electronic Elements, Ch 2-69, Range up to 40 Miles VHF Low Band, 50 Miles VHF High Band, 30 Miles UHF



Premium Grade High Gain, Hi Input Level Capacity, Pre Amplifier, Internal RF Shielding, Split Band Amplification. Gain up to 29dB UHF/VHF, Low Noise. Surface Mount Design, Switchable FM Trap, High Quality Transistors, 75 Ohm Input/output Mast Mounted, Indoor Power Supply with Power LED.


10G202



Adjustable Gain Pre Amplifier, Split Band Amplification. Gain up to 30dB UHF/VHF, Low Noise. Surface Mount Design, Switchable FM Trap, High Quality Transistors, 75 Ohm Input/output Mast Mounted, Indoor Power Supply with Power LED.

10G212





RG6 Coax


RG/6U-500 500'
Reel (Bulk)



RG6U Pre-Made Lengths with Molded Connections

LKG
RG603 3ft Length
RG625 25ft Length
RG650 50ft Length

Reliant
21-2015 6ft Length
21-2018 9ft Length
21-2020 12ft Length
21-2023 15ft Length
21-2025 18ft Length
21-2040 75ft Length
21-2045 100ft Length



RG59 Coax

RG/59U-500 500'
Reel (Bulk)
RG/59U-500 1000'
Reel (Bulk)



RG59U Pre-Made Lengths with Molded Connections

Reliant
21-1000 1ft Length
21-1010 3ft Length
21-1015 6ft Length
21-1018 9ft Length
21-1030 25ft Length
21-1035 50ft Length
21-1040 75ft Length
21-1045 100ft Length



Matching Transformer
75/300 Ohm. For UHF and VHF Signals.

60-008 LKG



Weatherproof Matching Transformer
75/300 Ohm. For UHF and VHF Signals.



Signal Splitters
5Mhz to 900Mhz

Signal Splitters
900MHZ to 2050

LKG
60-002 Two Way
60-006 Three Way

LKG
6125 Two Way

Bulk
3Way Three Way
4Way Four Way

Arista
59-1940 Four Way



Wall Plates

Dual F81 Wall Plate Ivory

Reliant
21-1253 1 Pk.



Single F81

Arista
58-2106 1 Pk. Ivory

LKG
60-024 1Pk. Ivory

21-1252 1 Pk. White



RG6U Compression Fittings. 25 Per Bag
PV6-PV



Twist On F Fittings

Reliant
22-2255 2 Pk RG59U
22-2254 2 Pk RG6U



F81 Coupler

60-116 1 Pk. **LKG**
22-1516 2 Pk. **Reliant**



F81 Coupler Male

TVFTF 1 Pk. **Pfantone**



HDMI cables provide an uncompressed digital link between consumer electronics equipment such as DVD players Cable or Satellite boxes and audio/video monitors such as Plasma & LCD Display Screens for HDTV's. Suitable for 1080p and Lower Video formats.

Pyle Home
PHDM3 3ft Length
PHDM6 6ft Length
PHDM12 12ft Length



Standard AGC Type
Fuses 1/4" X 1 1/4"



Standard GMA Type
Fuses 0.75"L

Cranking Power

2 per pack

Part Number	Amps
AS-AGC1A/2	1 Amp
AS-AGC2A/2	2 Amp
AS-AGC3A/2	3 Amp
AS-AGC4A/2	4 Amp
AS-AGC5A/2	5 Amp
AS-AGC10A/2	10 Amp
AS-AGC15A/2	15 Amp
AS-AGC20A/2	20 Amp
AS-AGC25A/2	25 Amp
AS-AGC30A/2	30 Amp
AS-AGC40A/2	40 Amp
AS-AGC50A/2	50 Amp

D&R Fuses

5 per pack

Part Number	Amps
3AG-1/4A	0.25 Amp
3AG-1/6A	0.60 Amp
3AG-3/4A	0.75 Amp
3AG-1 1/2A	1.50 Amp
3AG-2 1/2A	2.50 Amp
3AG-3A	3.0 Amp
3AG-3 1/2A	3.50 Amp
3AG-7 1/2A	7.50 Amp
3AG-8A	8.0 Amp

LKG 2 per pack

Part Number	Amps
TVGMA0.5A/2	0.5 Amp
TVGMA1A/2	1.0 Amp
TVGMA1.5A/2	1.5 Amp
TVGMA2A/2	2.0 Amp
TVGMA2.5/2	2.5 Amp
TVGMA3A/2	3.0 Amp
TVGMA4A/2	4.0 Amp
TVGMA5A/2	5.0 Amp



Standard ATC
Blade
Type Fuses



Mini Blade
Type Fuses



Maxi Blade
Type Fuses

Cranking Power

2 per pack

Part Number	Amps
AS-ATC3A/2	3 Amp
AS-ATC5A/2	5 Amp
AS-ATC7.5A/2	7.5 Amp
AS-ATC10A/2	10 Amp
AS-ATC15A/2	15 Amp
AS-ATC20A/2	20 Amp
AS-ATC25A/2	25 Amp
AS-ATC30A/2	30 Amp
PAP8 Mixed	Mixed

Cranking Power

5 per pack

Part Number	Amps
ASATM2A	2 Amp
ASATM3A	3 Amp
ASATM7.5A	7.5 Amp
ASATM10A	10 Amp
ASATM20A	20 Amp
ASATM25A	25 Amp
ASATM30A	30 Amp
64-6020 5 Pk	20 Amp

Cranking Power

1 per pack

Part Number	Amps
ASMAX20A	20 Amp
ASMAX30A	30 Amp
ASMAX40A	40 Amp
ASMAX50A	50 Amp
ASMAX60A	60 Amp
ASMAX80A	80 Amp
ASMAX100A	100 Amp
ASMAX120A	120 Amp



AGU Type
Fuses



ANL Wafer
Type Fuses

Cranking Power

5 per pack

Part Number	Amps
ASAGU20AGL	20 Amp
ASAGU30AGL	30 Amp
ASAGU40AGL	40 Amp
ASAGU50AGL	50 Amp
ASAGU60AGL	60 Amp
ASAGU80AGL	80 Amp

EFX Scosche

1 per pack

Part Number	Amps
P130WF	130 Amp
P150WF	150 Amp
P200WF	200 Amp



Fuses and Accessories



Cranking Power
In Line AGC Type
Fuse Holder
AS-AGC10FH 10 Ga.
AS-AGC12FH 12 Ga.
Fuse Not Included



LKG Fuse Holder
Screw Type Cap
525 For GMA Type Fuse
526 For AGC Type Fuse



Cranking Power
8 Ga Fuse Holder
Accepts Maxi Blade
Type Fuses
ASMMAX8FH



Cranking Power
4-8-10 Ga. Wire Inline
Fuse Holder. Accepts
AGU Type Fuses
ASAGU4/8/10FH



Scosche
In Line Fuse Block
Weather Resistant
4-8 Ga. Wire
Includes 40 & 80 Amp
Maxi Blade Type Fuse
PMFIK



Lanzar
Inline Fuse Holder with
1ft 4 Ga. Power wire, 60
Amp AGU Fuse and
Terminal Ring
LQ42



Scosche
Hi Amperage In Line Fuse
Block 0-1-4 Ga. Wire
Accepts ANL Type Wafer
Fuses
PWHFI



Pyramid
4-8-10 Ga Wire
Inline Fuse Holder.
Accepts AGU Type Fuses
Includes 30 Amp Fuse
RFPS



Cranking Power
Fused Power Dist.
One 4 Ga. Wire In
Two 8 Ga. Wire Out
Accepts AGU Fuses (not
included)
ASMFB2AGU1



EFX Core Wafer Fuse
Holder. 0-1-4 Ga.
Power Wire. Accepts
ANL Type Wafer
Fuses
CWFH

Valco-Tronics 1-800-673-2244

Notes:





Cranking Power
This shielded cable is a high quality car stereo cable. The center conductor is Oxygen Free Copper Encased in a clear protective jacket All Connections are 24K Gold with strain reliefs

- AS2015** 1.5 Foot
- AS2030** 3 Foot
- AS2060** 6 Foot
- AS2112** 12 Foot
- AS2117** 17 Foot
- ASC25** 25 Foot



Shielded Dual RCA Cable with Strain Reliefs

- LKG**
- 38-141** 3 Foot
 - 38-142** 6 Foot
 - 38-139** 25 Foot

- Reliant Products**
- 12-2410** 3 Foot
 - 12-2420** 6 Foot
 - 12-2421** 12 Foot
 - 12-2422** 25 Foot

- Pfansthiel**
- AA1.5AA** 1.5 Foot
 - TV-AA6AAST** 6 Foot



Shielded Single Stereo 3.5MM Extension Male to Female

- LKG**
- 71-1812** 12 Foot Straight
 - 38-140** 10 Foot Straight
 - 38-185** 10 Foot Coiled



Shielded Single Stereo 3.5MM Aux Cable Male to Male

- Scosche**
- I335** 3 Foot Straight Metal Connectors. Includes 3.5MM Coupler

- LKG**
- PR5** 3 Foot Straight Molded Connectors



3.5MM Mono Male To Single RCA Female
6'
38-285



IU3.5RC 3 Foot Retractable



RCA Single Male to RCA Single Female 6'
A6L



RCA Single Male to Two tinned Shielded Wires
CA65 6 Foot

3.5MM Mono Male To Single RCA Male 6'
12-2470



3.5MM Mono Male to 3.5MM Mono Male
F6F 6 Foot
12-2155 2 Foot



Shielded Multi Purpose Audio Cable

RCA Single Male to Male
Reliant Products
12-2110 6 Foot
12-2115 10 Foot

LKG/Pfansthiel
38-153 10 Foot
TVA6A 6 Foot

Can't find what you are looking for just call 1-800-673-2244

Fully Shielded Audio Cable with Flexible black jacket.



1/4" Stereo Male to Two
RCA Male 6'
44-286



1/4" Stereo Male to Two
RCA Female 6'
44-288



1/4" Mono Female to Two
1/4" Mono Male 6"
44-242



1/4" Stereo Male to Two
1/4" Stereo Female
38-184



1/4" Stereo Female to Two
RCA Male 6"
44-212



3.5 MM Stereo to Two RCA
Female 6"
38-197



3.5 MM Stereo to Two 3.5
MM Stereo Female 6"
38-196



3.5 MM Stereo Male to
Two RCA Male 3'
38-204



3.5MM Mono Male to Two
3.5 MM Mono Female
38-402



3.5MM Mono Female to
Two 3.5MM Mono Male
38-403



3.5MM Male Stereo to
Two 3.5MM Male Mono
Y6FF



3.5MM Mono to
Two RCA Male
12-1040



2 RCA Female to 4 RCA
Male 6"
45-800G



2 RCA Male to 4 RCA
Female 6"
45-801G



RCA Female to Two RCA
Male 6"
38-188



RCA Male to Two RCA
Female 6"
38-189
12-1010



RCA Male to Two
RCA Male
12-1020
A4AA

*Specs and images may change without notice.



Mono 1/4" Male
RCA Female

38-303



Stereo 1/4" Male
3.5MM Female

38-222



Mono 1/4" Male
3.5MM Female

38-302
PTC



Stereo 3.5MM Male
1/4" Female

38-320
558A



Mono 3.5MM Male
3.5MM Female

38-315
560A



Mono 2.5MM Male
3.5MM Female

20-542



Mono 3.5MM Male
RCA Female

38-304
533A



Mono 3.5MM
female
RCA Male

12-1150
PTA



RCA Coupler
Male Male
20-535 (2/pk)
Metal



RCA Coupler
Female Female
38-310 (2/pk.)



3.5MM Stereo Male
2-1/4" Stereo Female

12-1140



1/4" Stereo Female
3.5MM Mono Male

NTF



1/4" Mono Female
3.5MM Mono Male

NTF



1/4" Stereo
Female Jack

16-4905 (2 pk)
12-1520 (2 pk)
16-4915 (1 pk Metal)
NN (1 pk)



1/4" Enclosed
Stereo Jack
Panel Mount

NU2 (1 pk)



3.5MM Stereo
Female Jack

16-4715 (2 pk Metal)
16-4705 (2 pk Plastic)
OO (1 pk Plastic)
12-1550 (2 pk Plastic)
20-125 (2 pk Plastic)



3.5MM Enclosed
Jack Panel
Mount

16-144 (2 pk
Stereo)
12-1530 (2 pk
Mono)



3.5MM Stereo
Jack Panel Mount

PU (1 pk)



1/4" Mono Plug

523WS (1 pk Metal)
527BLK (1 pk Plastic)

* Specs. and Images may change without notice.



Female "F"
RCA male

60-102



"F" Coupler
Female

60-116



"F" Female
RCA Female

60-070



"F" Male
RCA Female

60-104



"F" Pushon
Quick Connect

60-100



"F" Coupler
Male

TVFTF



F56 with Crimp
Ring 4 pk

22-1513



F56 Twist On
2 Pk.

22-2254



SMA to PL258
Adapter

22-1221



Mini UHF
Crimp On

22-1203



Mini UHF Push
On/ Crimp

22-1201



Mini UHF
Twist On
RG58U

22-1222



Mini UHF
Coupler

22-1205



Mini UHF
Coupler

22-1206



Mini UHF Female
UHF Adapter

22-1212



BNC Crimp

22-1314 (RG59)
22-1315 (RG58)



BNC Twist On
(RG59)

22-1316
TVB1



BNC "T"
3 Female

22-1312



BNC Male Mini
UHF Female
Adapter

588
22-1217



BNC Male "F"
Female Adapter

960



BNC Female
UHF Male
Adapter

60-129



Mini UHF Male
BNC Female
Adapter

22-1213



RCA Male
BNC Female
Adapter

60-110



TNC Crimp On

22-1319 (RG59)
22-1323 (RG58)



TNC Twist On
RG59

22-1318



TNC Push On
Adapter

22-1320



TNC Male
UHF Female
Adapter

22-1218



TNC Push
On Crimp

22-1321



TNC 90
Adapter

22-1327



PL259 Crimp

22-3109



PL259 T Adapter

360-56202



PL259 Coupler

553A
360-56200



PL259 90
Adapater

551A

If the connector/adapter
you need, is not listed please call
1-800-673-2244

AC to DC Regulated Power Supplies



Pyramid 2.5 Amp Power Supply
 Input: 115V AC 60Hz 50 Watts
 Output: 13.8V DC
 2.5 AMP Constant/3 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit Protection Fuse Protected
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.48"L x 4.92"W x 3"H
PS3KX



Pyramid 3 Amp Power Supply
 Input: 115V AC, 60Hz, 50 Watts
 Output: 13.8V DC
 3 AMP Constant/4 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit Protection Fuse Protected
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.48"L x 4.92"W x 3"H
PS4KX



Pyramid 5 Amp Power Supply
 Input: 115V AC 60Hz 70 Watts
 Output: 13.8V DC
 5 AMP Constant/7 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit & Thermal Protection Fuse Protected
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.48"L x 4.92"W x 3"H
PS7KX



Pyramid 6 Amp Power Supply
 Input: 115V AC 60Hz 100 Watts
 Output: 13.8V DC
 6 AMP Constant/8 AMP Surge
 Powers Cell Phones 12V DC CB Radios Scanners etc.
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit Thermal Protection Fuse Protected
 Heavy Duty Cabinet Heatsink w/Anti-Skid Rubber Feet
 Dimensions: 7.48" L x 4.92"W x 3"H
PS8KX



Pyramid 6 Amp Power Supply
 Input: 115V AC, 60Hz, 70 Watts
 Output: 13.8V DC
 5 AMP Constant/7 AMP Surge
 Convenient Cigarette Lighter
 Screw Terminal Connectors
 Powers Cellular Phones, 12V DC CB Radios, Scanners, etc.
 Electronic Overload Protection w/ Auto Reset
 Short Circuit & Thermal Overload Protection
 Fuse Protected
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.48"L x 4.92"W x 3"H
PS9KX



Pyramid 10 Amp Power Supply
 Perfect for Home Shop and Hobbyist
 Input: 115V AC 60Hz 250 Watts
 Output: 13.8V DC
 10 AMP Constant/12 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit & Thermal Protection Fuse Protected
 LED Condition Indicators
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.87"L x 7.16"W x 4.72"H
PS12KX



Pyramid 12 Amp Power Supply
 Input: 115V AC 60Hz 270 Watts
 Output: 13.8V DC
 12 AMP Constant/14 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/ Auto Reset
 Short Circuit Thermal Protection Fuse Protected
 LED Condition Indicators
 Heavy Duty Cabinet Heatsink with Anti-Skid Rubber Feet
 3 Prong Grounded AC Plug
 Dimensions: 7.87"L x 7.16"W x 4.72"H
PS14KX



Pyramid 10 Amp Power Supply
 Input: 115V AC, 60Hz, 250 Watts
 Output: 13.8V DC
 10 AMP Constant/12 AMP Surge
 Screw Terminal Connectors
 Short Circuit Thermal Protection
 Convenient Cigarette Lighter Plug
 Electronic Overload Protection w/ Auto Reset
 Fuse Protected
 LED Condition Indicators
 Heavy Duty Cabinet Heatsink with Anti-Skid Rubber Feet
 Dimensions: 7.87"L x 7.16"W x 4.72"H
PS15KX



Pyramid 20 Amp Power Supply
 Input: 115V AC 60Hz 450 Watts
 Output: 13.8V DC
 18 AMP Constant/20 AMP Surge
 Screw Terminal Connectors
 Crowbar Over-Voltage Protection
 Electronic Overload Protection w/Auto Reset
 Short Circuit Thermal Protection
 Fuse Protected
 LED Condition Indicators
 Built-in Cooling Fan
 Heavy Duty Cabinet
 Heatsink with Anti-Skid Rubber Feet
 Dimensions: 11.81"L x 9.05"W x 4.92"H
PS21KX



Pyramid 22 Amp Power Supply
 Built-in Cooling Fan
 Input: 115V AC 60Hz 500 Watts
 Output: 6~15V DC(Adjustable)
 22 AMP Constant/25 AMP Surge
 Screw Terminal Connectors
 Short Circuit & Thermal Protection
 Fuse Protected
 LED Condition Indicators
 Heavy Duty Cabinet & Heatsink with Anti-Skid Rubber Feet
 Electronic Overload Protection w/Auto Reset
 Dimensions: 11.81"L x 9.05"W x 7.08"H
PS26KX



Pyramid 5 Amp Adjustable Power Supply
 Input: 110/120VAC 60 Hz.
 Output Current: 0-5A Adjustable
 Output Power: 0-30V Adjustable
 Fine & Coarse Voltage Adjustments for Accurate Settings
 Short Circuit Protection
 Overload Protection with Instant Automatic Reset
 Meter (Current/Voltage)
 Suitable For Scientific & Technical Applications
 Dimensions: 11.5"L x 9"W x 4.75"H
PS32LAB



Pyramid 32 Amp Power Supply
 Built-in Cooling Fan
 Input: 115V AC, 60Hz, 600 Watts
 Output: 12~15V DC(Adjustable)
 32 AMP Constant/35 AMP Surge
 Screw Terminal Connectors
 Short Circuit & Thermal Protection
 Fuse Protected
 LED Protection Indicators
 3 Prong Grounded AC Plug
 Heavy Duty Cabinet & Heatsink with Non-Skid Rubber Feet
 Dimensions: 14"L x 9.17"W x 4.92"H
PS36KX



Pyramid 35 Amp Power Supply
 Built-in Cooling Fan w/On-Off Switch
 Input: 115V AC 60Hz 750 Watts
 Output: 13.8V DC Not Adjustable
 35 AMP Constant/40 AMP Surge
 Screw Terminal Connectors
 Electronic Overload Protection w/Auto Reset
 Short Circuit Thermal Protection
 Crowbar Over Voltage Protection
 Fuse Protected
 Heavy Duty Cabinet Heatsink with Anti-Skid Rubber Feet
 Dimensions: 12.5"L x 13.20"W x 5.31"H
PS46KX



Pyramid 40 Amp Power Supply
 Built-in Cooling Fan
 Input: 115V AC 60Hz 1000 Watts
 Output: 12~15V DC(Adjustable)
 46 AMP Constant/52 AMP Surge
 Screw Terminal Connectors
 Short Circuit Thermal Protection
 Fuse Protected
 LED Condition Indicators
 Heavy Duty Rack Mountable Cabinet Heatsink
 Electronic Overload Protection w/Auto Reset
 Dimensions: 12"L x 19"W x 4.5"H
PS52KX



Pyramid 60 Amp Power Supply
 Rack Mountable Chassis
 Built-in Cooling Fan
 Input: 115V AC 60Hz
 Output: 13.8V DC 60 AMP Max
 Multiple Screw Terminal Connectors
 Electronic Overload Protection w/Auto Reset
 Short Circuit Thermal Protection
 Crowbar Over Voltage Protection
 Resettable Circuit Breaker
 Heavy Duty Cabinet Heatsink
 4 Roller Casters
 Dimensions: 13.31"L x 19"W x 6.93"H
PS64KX



Pyramid 80 Amp Power Supply
 Rack Mountable Chassis
 Multiple Screw Terminal Connectors
 Crowbar Over-Voltage Protection
 Electronic Overload Protection with Auto-Reset
 Short Circuit Thermal Protection
 Resettable Circuit Breaker
 Built-In Cooling Fan
 Heavy Duty Cabinet Heatsink W/Anti-Skid Rubber Feet
 4 Roller Casters
 Input: 115V Ac, 60Hz
 Output: 13.8V Dc
 80 Amp Constant
 85 Amp Surge
PS86KX



Cobra Microport 150 Watt Power Inverter
 50 Watts Continuous Power
 300 Watts Peak Power
 5 Volt USB Output
 Airplane/Cigarette Lighter Power Cable
 Ideal for Video Games, Mobile Phones and Laptops
 Carrying Case Included
CPI150BK



Cobra 200 Watt Power Inverter
 200 Watts Continuous Power, 400 Watts Peak Power
 5 Volt USB Output
 Ideal for Video Games, Mobile Phones and Laptops
 Cup Holder Design
CPI200CH



Cobra 400 Watt Power Inverter
 400 Watts Continuous, 800 Watts Peak Power
 Cigarette Lighter Cord and Direct-to-Battery Cables Included
 Dual AC Outlets and USB Output
 Compact size
CPI480



Cobra 1500 Watt Power Inverter
 1500 Watts Continuous Power, 3000 Watts Peak Power
 Remote On/Off Capable
 USB Output
 LED Function/Status Meter
CPI1575



Cobra 2500 Watt Power Inverter
 2500 Watts Continuous
 5000 Watts Peak Power
 Power/Amp Meter
 Remote On/Off Capable
 USB Output
 LED Function/Status Meter
CPI2575



Sima 1000 Watt Power Inverter. 1000 watts of AC power to give you the current to run anything from a cell phone charger to a small TV; including work lights drills vacuums laptops fax machines soldering irons and more. Comes with four foot ring terminal cables for temporary installation.
STP1000



Sima STP1500 provides 1500 watts of AC power to give you the current to run anything from a cell phone charger to a small TV; including work lights drills vacuums laptops fax machines soldering irons and more. Comes with four foot ring terminal cables for temporary installation.
STP1500

Valco-Tronics
1-800-673-2244
Notes:



Pyle Receivers



Pyle 3" TFT LCD Monitor
MP3 MP4 SD USB Player &
AM/FM Receiver
Parking Video Output
30 Preset Stations
Memory (18FM/12AM)
2 Channel RCA Preamp
Output
Front Video/AUX Input
(Ipod/MP3)
240 Watts Total Output
(4 X 60 Watts)
PL3MP4



Pyle AM/FM-MPX Electronic
Tuning Radio w/USB/SD/
MMC Reader
Electronic Volume/Bass/
Treble/Balance Control
Digital LCD Display Panel
RA Line Output
Mute/Clock
30 Radio Preset Station
Memory 18FM-12AM
USB Mp3 Player
SD/MMC MP3 Player
200 Watts Total Output
PL91MU



Pyle AM/FM-MPX Elec-
tronic Tuning Radio w/
USB/SD/MMC Reader
Multi-Colors LCD Digital
Display
Preset Equalizer
Encoding Volume,
Balance, Bass, Treble &
Fader Control
30 Radio Preset Station
Memory 18FM-12AM
Front Auxiliary Input
Jack
RCA Line Out Jack
4x60 Watts Maximum
Power Output
PL94MU



Pyle AM/FM-MPX Elec-
tronic Tuning Radio w/
USB/SD/MMC Reader
Digital LCD Display
Panel
RCA Line Output
Mute/Clock
30 Radio Preset Station
Memory 18FM-12AM
USB Mp3 Player
SD/MMC MP3 Player
200 Watts Total Output
PL95MU



Pyle AM/FM-MPX Manual
Tune Radio CD Player
w/ Detachable Face
Full Stereo System
Bass/Treble Control
Big Size LCD Display
LO/DX Control
Built In Preset EQ
Loudness Control
RCA Line Out Jack (1
Set)
Front Panel Auxiliary
Input
Random/Repeat/Intro
160 Watts Total Output
(4 X 40 Watts)
PLCD23A



Pyle AM/FM Receiver
Auto Loading CD/ MP3
Player
Multi-Color LCD Digital
Display with Dancing
Spectrum
AUX-IN on Front for
Portable MP3 Players
ID3 Tag Function
Balance/Treble/Bass/
Fader Control
Preset EQ (POP/Rock/
Classic/Flat)
RCA Line Out
200 Watts Total Output
(4 X 50 Watts)
PLCD28M



Pyle AM/FM Receiver Auto
Loading CD/MP3 Player
w/USB Input
Multi-Color LCD Digital
Display with Dancing
Spectrum
AUX-IN On Front for
Portable MP3 Players
Built-In USB Port for
Playing MP3
RCA Line Out
200 Watts Total Output
(4 X 50 Watts)
PLCD29MU



Pyle Marine CD/MP3
Player
CD/CDR/CDRW/MP3/
WMA Compatible
Auxiliary Input
Function
Full Function LCD
Display
Auto Best Station
Memory
Loudness Mute
Button
Full Illumination
4x25 Watts Maximum
Power Output
PLCD13MR



**Full Line of Scosche Audio
Installation Accessories**

1-800-673-2244



Pyle Receivers



Pyle AM/FM-MPX Anti-Shock CD/MP3 Player with AUX, Input & Remote Control SD/USB Interface Anti-Theft Detachable Face Auto Station Search with Memory Auxiliary Input RCA Preamp Output 240W Maximum Total Output And Much More
PLCD42M



Pyle AM/FM- CD/MP3 & SD/MMC/USB With Bluetooth Wireless Technology RCA Preamp Output Motorized Slide Down Detachable Face 30 Station Memory: 18FM/12AM Audio Control: Vol/Bal/ Bas/Tre/Fad
PLCD70MUB



Pyle AM/FM-CD/MP3/ WMA/CDRW- Cassette Radio With Detachable Face Bass/Treble/Balance/ Fader Control Full Night Illumination RCA Line Out Jack (1 Set) Subwoofer Line Output 30 Memories 18FM/ 12AM 4x50 Watts (200 Watt Max)
PLCDCS90M



Pyle AM/FM-MPX CD/ MP3 Player w/USB/SD Input & Motorized Slide Down Detachable Face 30 Station Memory: 18FM/12AM CD-R/CD-RW for MP3 Playback Audio Control: Volume/ Balance /Bass/Treble/ Fader RCA Preamp Output 240 Watts Maximum Total Output
PLCDUSB78MP3



Pyle 3" TFT Touch Screen DVD/VCD/MP3/MPEG4/ CDR/USB Player & AM/FM Receiver Anti-Shock Mechanism RCA Line Out Preset EQ Subwoofer Output Selectable View Angle Rear Camera Output Parking Video Input A/V Input A/V Output 320 Watts (4 x 80 W)
PLD3MU



Pyle 4.3" TFT Touch Screen DVD/VCD/ MP3/CD-R/USB Player & AM/FM Receiver Dolby Digital Coaxial Outputs RCA Line Out Subwoofer Output A/V Input A/V Output Front Aux Line Input Jack(MP3/Ipod) 320 Watts (4 x 80w)
PLD43MU



Pyle 4.5" TFT Touch Screen Monitor w/DVD/ VCD/USB/SD/MP3/CD Player & AM/FM/RDS Radio 30 Station Memory (18FM/12Am) Clock Function/Mute Control Front Panel AUX Input RCA Line Out/Presets EQ Subwoofer Output Selectable View Angle SD/MMC Card Slot A/V Input & A/V Output Direct Connection of Alternate Audio/Video Source Input Jack (MP3/Ipod) Wireless Remote Control Rear Camera Output/ parking Video Input USB Connector 320 Watts (4 x 80W)
PLD45MU



Pyle 5" TFT Touch Screen DVD/VCD/CD/ MP3/CD-R/USB/ AM/FM/ Bluetooth and Screen Dial Pad Touch Screen Control Operation 30 Station Memory(18FM/12AM) On Screen Display Title, Time, Chapter, Subtitle Angle Dolby Digital Coaxial Outputs Clock Function Mute Control RCA Line Out Preset EQ Subwoofer Output Selectable View Angle A/V Input A/V Output Audio/Video Aux Line Input Jack(Mp3/Ipod) 320 Watts (4 x 80w)
PLD51MUBT





Pyle Receivers



Pyle 5" TFT DVD/ VCD/ CD/ MP3/CD-R/ USB/ AM/FM/ RDS Receiver
30 Station
Memory(18FM/12AM)
Dolby Digital Coaxial Outputs
RCA Line Out
Preset EQ
Subwoofer Output
Selectable View Angle
A/V Input A/V Output
Audio/Video Aux Line Input Jack(Mp3/Ipod)
PLD5MU



Pyle 7" TFT Touch Screen DVD/VCD/CD/MP3/CD-R/USB/AM/FM/RDS Receiver & Bluetooth System
RCA Line Out
Preset EQ
Subwoofer Output
Selectable View Angle
A/V Input & A/V Output
SD/MMC Card Slot
11 Kinds Of Background Color
320 Watts (4 X 80w)
PLD70BT



Pyle 7" TFT Touch Screen DVD/CD/MP3/CD-R/USB/AM/FM/RDS Receiver
30 Station
Memory(18FM/12AM)
RCA Line Out
Preset EQ
Subwoofer Output
Selectable View Angle
A/V Input & A/V Output
SD/MMC Card Slot / USB Input Jack
320 Watts (4 X 80w)
PLD71MU



Pyle 7" Single DIN TFT Touch Screen DVD/MP3/MP4/CD-R/USB/SD/AM/FM/RDS Receiver
Touch Screen Control Operation
Dolby Digital Coaxial Outputs
Front Panel AUX Input (Ipod/MP3)
RCA Line Out/ Preset EQ
Subwoofer Output
Razor Front Panel with Back-Lit
PLD7MU



Pyle 8" Single DIN TFT Touch Screen DVD/VCD/CD/MP3/MP4/CD-R/USB/SD/AM/FM/RDS Receiver
30 Station Memory (18FM/12AM)
Front Panel AUX Input
RCA Line Out/ Preset EQ
Subwoofer Output
Selectable View Angle
A/V Input & A/V Output
SD/MMC Card Slot
Audio/Video Line Input Jack
320 Watts (4 x 80W)
PLD89MU



Pyle AM/FM-MPX DVD/ VCD/SVCD/CD/MP3/MP4 Player Receiver w/USB Interface & SD/MMC Card Reader
Multi-Color LCD Digital Display
USB Input/SD/MMC Card Slot
Front Aux Input Jack (Ipod/MP3)
Audio & Video Input & Output
4 X 80w (320 Watts Total Power)
PLD96MU



Pyle 7" Double DIN TFT Touch Screen DVD/VCD/CD/MP3/MP4/CD-R/USB/SD-MMC CARD SLOT/AM/FM/Bluetooth
30 Station Memory (18FM/12AM)
Double-DIN Chassis
RCA Line Out Preset EQ
Subwoofer Output
Selectable View Angle
A/V Input & A/V Output
SD/MMC Card Slot-USB Connector
320 Watts (4x80W)
PLDN72BT



Pyle 7" Motorized TFT Touch Screen DVD/CD/MP3 Player/AM/FM/SD USB/Built-In GPS/TTS w USA/Canada & Mexico Maps
4 Channel RCA Preamp Output/Subwooferr Output
Text to Speech & Turn by Turn Voice prompts
PLDNV74U



Pyle AM/FM-MPX MP3 Shaft Style Dual Knob Radio w/ USB/SD/AUX-In
Built-In USB/ SD/ MMC MP3 Player
AUX-In Jack (Front)
RCA Line Out
2 Channel Output 100W x 2
PLR22MPF



Pyle AM/FM Receiver MP3 Playback with USB/SD/AUX-IN
Built-In USB/SD Ports
LCD Digital Display
AUX-IN Jack (Front)
Folder Up/Down Function
Clock Function
2-Channel output 100W x 2
PLR24MPF



Red Label Series



Pyle 4" Electroplated Red Polypropylene Cone Rubber Edge
1" High Temperature Ferro
1" Mylar Dome Tweeter
70 Watts RMS/140 Watts Peak Power
4 Ohm Impedance
PLRL42



Pyle Pair 4"x 6" Two-Way Speaker System
Electroplated Red Polypropylene Cone Butyl Rubber Surround
1" Mylar Dome Tweeter
90 Watts RMS/180 Watts Peak Power
4 Ohm Impedance
PLRL462



Pyle 5.25" Electroplated Red Polypropylene Cone Rubber Edge
Voice Coil
1" Mylar Dome Tweeter
80 Watts RMS/160 Watts Peak Power
4 Ohm Impedance
PLRL52



Pyle 5"x 7" & 6" X 8" 200 Watt Two-Way Speakers
Electroplated Red Polypropylene Cone Rubber Edge
1" Mylar Dome Tweeter
100 Watts RMS/200 Watts Peak Power
4 Ohm Impedance
PLRL572

Gear X Series



Pyle Pair 6.5" Two-Way Speaker System
Electroplated Red Polypropylene Cone Butyl Rubber Surround
1" Mylar Dome Tweeter
100 Watts RMS/200 Watts Peak Power
4 Ohm Impedance
Includes Grills Wires and Installation Hardware
PLRL62



Pyle 6"x 9" Three-Way Speaker System
Electroplated Red Polypropylene Cone Butyl Rubber Surround
2" Pole Mounted Aluminum Midrange
1" Mylar Dome Tweeter
200 Watts RMS/400 Watts Peak Power
4 Ohm Impedance
Includes Grills Wires and Installation Hardware
PLRL693



Pyle 3.5" Size Fits OEM Locations
Yellow Color Poly Injected Cone
Non-Fatiguing Butyl Rubber Surround
0.5" Neodymium Dome Tweeter
20 oz. Magnet Structure
Power Handling: 60 Watts RMS /120 Watts Peak
Includes Wires and Installation Hardware
PLG3.2



Pyle 4" Size Fits OEM Locations
Yellow Color Poly Injected Cone
Non-Fatiguing Butyl Rubber Surround
0.5" Neodymium Dome Tweeter
20 oz. Magnet Structure
70 Watts RMS /140 Watts Peak
4 Ohm Impedance
PLG4.2



Pyle 4"x10" Size Fits OEM Locations
Yellow Color Poly Injected Cone
2" Polymer Cone Midrange
0.5" Neodymium Dome Tweeter
150 Watts RMS /300 Watts Peak
Impedance: 4 Ohms
PLG41.3



Pyle 4"x6" Two Way Size Fits OEM Locations
Yellow Color Poly Injected Cone
0.5" Neodymium Dome Tweeter
30 oz. Magnet Structure
90 Watts RMS /180 Watts Peak
Impedance: 4 Ohms
PLG46.2



Pyle 4"x6" Size Three way Fits OEM Locations
Yellow Color Poly Injected Cone
0.5" Neodymium Dome Midrange
30 oz. Magnet Structure
90 Watts RMS /180 Watts Peak
Impedance: 4 Ohms
PLG46.3



Pyle 5.25" Size Two Way Fits OEM Locations
Yellow Color Poly Injected Cone
0.5" Neodymium Dome Tweeter
30 oz. Magnet Structure
70 Watts RMS /140 Watts Peak
Impedance: 4 Ohms
PLG5.2



Pyle 3 Way Standard 5.25" Size Fits OEM Locations
Yellow Color Poly Injected Cone
0.5" Neodymium Dome Midrange
Super Film Tweeter
70 Watts RMS /140 Watts Peak
4 Ohm Impedance
PLG5.3



Pyle 3 Way Standard 5"x7"/6"x8" Size Fits OEM Locations
Yellow Color Poly Injected Cone
0.5" Neodymium Dome Midrange
Super Film Tweeter
120 Watts RMS /240 Watts Peak
4 Ohm Impedance
PLG57.3



Pyle 4 Way Standard 6.5" Size Fits OEM Locations
Yellow Color Poly Injected Cone
1.75" Polymer Cone Midrange
0.5" Neodymium Dome Tweeter
Super Film Tweeter
150 Watts RMS /300 Watts Peak
4 Ohm Impedance
PLG6.4



Pyle 5 Way Standard 6"x9" Size Fits OEM Locations
Yellow Color Poly Injected Cone
2" Polymer Cone Midrange
0.5" Neodymium Dome Tweeter
2 x Super Film Tweeter
225 Watts RMS /450 Watts Peak
4 Ohm Impedance
PLG69.5

Chopper Series



Pyle 2-Way 4" Coaxial Speaker System With Concealed Magnet
0.5" Neodymium Dome Tweeter
1" High Temperature Aluminum Voice Coil
70 Watts RMS / 140 Watts MAX
4 Ohm Impedance
PLCH42



Pyle 2-Way 5.25" Coaxial Speaker System With Concealed Magnet
0.5" Neodymium Dome Tweeter
1" High Temperature Aluminum Voice Coil
80 Watts RMS / 160 Watts MAX
4 Ohm Impedance
PLCH52



Pyle 2-Way 6.5" Coaxial Speaker System With Concealed Magnet
0.5" Neodymium Dome Tweeter
1" High Temperature Aluminum Voice Coil
120 Watts RMS / 240 Watts MAX
4 Ohm Impedance
PLCH62



Pyle 3-Way 6X9 Triaxial Speaker System With Concealed Magnet
2.5" Film Cone Midrange
0.5" Neodymium Dome Tweeter
1.25" High Temperature Aluminum Voice Coil
180 Watts RMS / 360 Watts MAX
4 Ohm Impedance
PLCH693

Tweeters



Pyle 6-Way Sunvisor Mount 200 Watt Tweeter System
60mm Piezo-Type Midrange x 4
40mm Piezo -Type Tweeter x 2
100 Watts RMS/200 Watts Max
4 Ohm Impedance
Includes Wires and Installation Hardware (Mounting Straps)
PLTWVS



Pyle 1" 150 Watt Mini Dome Tweeter
Flexible Omni-Directional Mounting Base
12Db Crossover Network
Includes Custom Mount Wires and Installation Hardware
PLST7



Pyle 1" 120 Watt Mini Mylar Dome Tri-Mount Tweeter
Tri-Mounting System: Pivot/Angle/Surface
60 Watts RMS/120 Watts Max
Integrated Crossover System
PLWT3



Pyle 1.5" 200 Watt Surface Mount Piezo Tweeter
Surface Mounting System
100 Watts RMS/200 Watts Max
Includes Custom Mount Wires and Installation Hardware
PLWT4



Cable Free Moon Phase Weather Clock Indoor Outdoor Humidity Barometric Pressure Easy to Read Icons Table Top or Wall Mountable
BAR928



Weather Forecaster Hygrometer and Clock Monitors outdoor temperature and humidity in up to 3 different locations. Clock sets to the signal from the U.S. Atomic Clock
BAR112HG



Clock Calendar and Thermometer. Real Time Weather Data. Atomic Clock, Weather Forecast Icons. Alarm Clock with Snooze.
BAR636



Weather Forecaster with Temp and Humidity. Auto Time with Atomic Clock. Weather Forecast Icons. Moon Phase Indicator. Alarm with Snooze Feature
BAR638



Weather Forecaster with Clock Indoor/Outdoor Temperature. Monitors and plots the trends for temperature.
BAR888



Digital Weather Forecaster. Inside/Outside Remote Thermo Hygrometer Weather forecast and barometric trend. Atomic Clock
BAR913HGA



AM FM Radio Weather Forecaster with Atomic Clock, Displays indoor and outdoor temp. Alarm Clock and Snooze
BARM699A



Handheld Weather Forecaster Alarm Clock Displays temp. and humidity, Digital clock and calendar, Moon phase indicator, Severe weather alert indicator
EB313HGA



Wide Screen Melody Clock, 24 Melodies, Jumbo Display Clock with Alarm and 8 minute snooze function. Special Event Icons
JC818



Pedometer with Panic Alarm. Calorie Consumption. Distance Measurement. Real time Clock. Step Counting Function.
PED319



World Time Travel Clock, Compact Stylish U.S. Atomic Clock, 12 or 24-hour clock & calendar, Snooze function
RM932



Atomic Clock with Dual Snooze Alarm. Alarms with melody and time/day/date display
RM982



Atomic Alarm Clock With Thermometer. Displays Clock, Calendar & Indoor Temp. Single Alarm and Weekday Alarm with Snooze Function.
RM983A



Multi Band World Travel Alarm Clock sets itself by radio signal in Central Europe UK US or Japan, Month Day Calendar, Snooze Function.
RMB383



Atomic Clock Picture Frame with Indoor Outdoor Temp. Includes two user changeable front casings in gray and blue colors
RMR232PHA



Stylish Unique Thermometer & Clock. With this piece you'll know the humidity temperature precise time and more. Automatically sets to the U.S. Atomic Clock 3-tier LCD screen displays.
RMR613HGA



Executive Clock with Temperature and Humidity. 3 ch. allow monitoring the temp and humidity in up to three remote locations. Atomic Clock
RMR616HGA



Weather Radio with Temp & Freeze Alarm. Monitors all NOAA channels. Temp. display clock and calendar. Dual alarm with snooze function. Freeze alarm with audio and visual alerts
WR113N



Portable Public Alert Radio Monitors U.S. Emergency All Hazards and Emergency Alert System. 100 decibel audio alarm. 3 levels of NOAA messages. Dual alarm with snooze function
WR601



Portable Public Alert Radio Stay prepared. Keeps your family informed of civil and weather disasters 24 hours a day. Keep your family safe with warnings such as Amber Alert Tornado Flash Flood and Civil Emergencies. Receive weather and civil warnings specific to your area even when the electricity is out.
WR602



Emergency Public Alert Radio with Weather Station. Local Weather Civil Emergency. Weather Forecast. Localized Warnings. Indoor Outdoor Temperature Portable radio with Docking Station.
WRB603



Slim Exact Set Travel Clock with Temperature automatically sets itself to the U.S. Atomic Clock adjusts for different time zones and displays indoor temp - an added benefit to aid travelers in keeping their hotel rooms comfortable.
RM928



Thermometer and Humidity Sensor with 10 Channels is compatible with the WMR80, WMR90A, WMR100 and WMR200. It allows you to expand the locations and information you monitor. The THGR810 sensor monitors both temperature and humidity readings and also features an on-board LCD screen.
THGR810



Wireless Temperature Sensor is a low-cost sensor with a water-resistant casing and a battery cover that's easy to slip on and off. Can be set to one of three different channels. Red LED light notifies when data transmission has been sent.
THN132N



Pyramid Dynamic Open Air Speaker Element Adjustable Headstrap Foam Padded Earpiece Impedance: 32 Ohms Nominal 1/8" Stereo Plug 4' Long Cord Maximum Input: 100mV Frequency Response: 20Hz-20kHz Sensitivity: 100dB @ 1kHz
HK67



Pyramid Lightweight Digital Stereo Headphones 1.5" Super Thin Diaphragm Open Back Adjustable Headstrap Oversize Foam Padded Earpiece Impedance: 32 Ohms Nominal Frequency Response: 20Hz-20kHz Sensitivity: 102dB SPL @ 1kHz Input Power: 200mV 9' Long Cord 1/8" Plug with 1/4" Adaptor
HP55



Pyramid Deluxe Hi-Fi Super Bass Headphones 2" Super Thin Diaphragm, Open Back Adjustable Headstrap Cushioned Oversize Earpiece Impedance: 32 Ohms Nominal Frequency Response: 20Hz-20kHz Sensitivity: 102dB SPL @ 1kHz Stereo/Mono Switch Volume Control 9' Long Cord 1/8" Gold Plated Plug with 1/4" Adapter
HP70



Pyramid Professional Digital Stereo Headphones 2" Super Thin Diaphragm Open Back Neodymium Magnets Adjustable Padded Headstrap Cushioned Earpiece Impedance: 64 Ohms Nominal Frequency Response: 20Hz-22kHz Sensitivity: 106dB SPL @ 1kHz Input Power: 200mV 9' Long Single Cord Design 1/8" Gold Plated Plug with 1/4" Adapter
HP75



Koss The Koss Quiet Zone™ QZ99 is an extra-durable Headphone that delivers amazing passive noise reduction. Designed initially for use with racing radio scanners and metal detectors the QZ99 has been a favorite for a wide range of listeners who need to cut high levels of ambient noise.
QZ99



Koss The Koss Quiet Zone™ Q5 is an extra-durable Headphone that delivers amazing passive noise reduction. Designed initially for use with racing radio scanners and metal detectors the Q5 has been a favorite for a wide range of listeners who need to cut high levels of ambient noise.
QZ5



Dynamic Element for extended frequency response Closed Leatherette ear cushions for isolation Pivoting Ear cups for flexible movement Adjustable Headband for best fit 1/8" to 1/4" Adaptable plug for home or portable use Straight Dual Entry 8ft. Cord 1/8" to 1/4" adaptable Plug 60 Ohms Impedance Distortion: <0.1% Sensitivity : 103dB SPL @ 1mW Closed, Cushioned Ear Cups
R10



The **TD85** is a full-size professional quality stereophone that delivers high quality stereo sound reproduction in a durable yet lightweight construction. Ideal for professional commercial or home use the TD85 features dynamic elements for a rich frequency response from 20-17000 Hz. Oxygen-free copper voice coils improve signal transmission and conduction for cleaner clearer sound. Closed leatherette ear cushions envelope the ear to enhance bass frequencies and isolate the listener. The result is a sound performance that captures every note while preventing sound leakage that can be distracting to others nearby-perfect for loud and busy settings like school language labs or commercial listening stations.



1/4" Female to 3.5MM Male Stereo Adapter
38-320



3.5MM Female to 1/4 Male Stereo Adatper
38-302



Telephone Accessories



Telephone Handset Cords

12 Foot

- 34-280W (White)
- 34-280A (Ash)
- 34-280I (Ivory)
- TLP12XPBG (Beige)

25 Foot

LKG

- 34-282OG (Platinum)
- 34-282I (Ivory)
- 34-282W (White)
- TLP25XPAH (Ash)
- TLP25XPAL (Almond)
- TEC25BWH (White)

Arista

- 24-2312 (Light Blue)
- 24-2321 (Yellow)
- 24-1396 (Gray)

Reliant Products

- 16-2101 (Ivory)
- 16-2102 (Ash)
- 16-2103 (Gray)
- 16-2107 (Light Blue)
- 16-2110 (Brown)
- 16-2112 (Peach)
- 16-2113 (Pink)
- 16-2114 (Yellow)



Telephone Line Cords

7 Foot

- 16-3099 (Silver)
- TLP4P7PIV (Ivory)

15 Foot

- 16-3101 (Silver)
- 16-3102 (Ivory)
- TL4P14PIV (Ivory 14')

25 Foot

- 24-0314 (Brown)
- 16-3105 (Red)
- 16-3109 (Black)
- 16-3108 (White)
- 16-3103 (Ivory)
- 16-3110 (Yellow)
- 16-3108 (White)
- 16-3107 (Silver)

50 Foot

- 34-229 (Ivory)
- 16-3203 (Silver)

100 Foot

- 16-3204 (Silver)
- 34-231 (Ivory)



25 Ft. Modular Phone Extension
24-1391 (Ivory)



25 Ft. Duplex Phone Extension
TL4P25JJIV (Ivory)



4 Wire Round Phone Line

- TL4/25 (25' Beige)
- TL4/50 (50' Beige)
- TL4/100 (100' Beige)
- 22/4-500BE (500' Beige)
- 22/4-1000BE (1000' Beige)



2 In 1 Modular Adapter 4 Wire
16-1110
34-257



3 In 1 Modular Adapter 4 Wire
16-1124



5 In 1 Modular Adapter 4 Wire
TEC39



Inline Modular Coupler 4 Wire
16-1105



Modular Jack with Block Assembly 4 Wire
TEC30



Modular Jack with Block Assembly 4 Wire
16-1106

6 Wire
16-6147



Wall Phone Mount Ivory
TL4WMTIV
16-1094



Flush Mount Wall Jack
TL4WJIV (Ivory)
16-1120 (Ivory)
16-1119 (White)



Dual Outlet Wall Plate
TLJWJJIV (Ivory)



Flush Mount Phone & F81
16-1104 (Ivory)





Docking Station iPhone/iPod MP3 Players



Scosche Digital FM radio tuner Alarm Clock for iPod
Wake up to iPod or buzzer
Snooze control
Safely charges your iPod while the included AC adapter is plugged in
Completely portable with 6AA batteries (not included)
Multifunction back lit LED Digital FM radio tuner
IALM



200 Watts High-Performance 2.1 Channel AM/FM Clock Radio Speaker With iPod / iPhone Docking Station(Black)
Compatibility: iPod Mini 1G; iPod Nano 1G, 2G, 3G,4G, 5G; iPod 3G, 4G, 5G, 5.5G, 6G; iPod Touch(Generation 1 & Generation 2)
;iPhone Aux Input Jack Allows Connection of Other Audio Devices, Such As MP3 and CD Players, Desktop Computers, Satellite Radio and Laptops. Includes AM/FM Radio, Clock, Alarm, And RF Remote With Full iPod Navigation. Radio Memory Station: AM 9 Station / FM 9 Stations
sleep timer 5MIN/15MIN/30MIN
Alarm Allows One To Wake Up To An iPhone, iPod, AM/FM Radio, Or Buzzer
Fully Function Remote Control
LCD Display, Equalizer Function Control (Pyle Home)
PHSCI20B



iPod iPhone Clock Radio W/ FM Receiver And Dual Alarm Clock (Black)
FM Stereo Radio PLL Digital Tuning System
10 Preset radio station memory
LCD Display with 7 Auto Changing Color Back-light
Back-light Color Select
Electric Volume +/- Control Compatible with iPhone 3GS & 4G, iPod Classic, iPod Video, iPod 5G, iPod Mini, iPod Nano & iPod Touch, (all Generations) Clock Display with Sleep & Snooze Function
Dual Alarm, Gradual wake up by Radio/iPod
Buzzer or iPhone/iPod songs
AC Adapter Operates, with DC 3V Battery back-up. (Pyle Home)
PICL34B



iPod/iTouch/iPhone Flat Panel Motorized Vertical FM Radio CD Sound System
Single Piece Flat Panel Micro System. Wall Mountable, and Supplied with Desk Stand and Shelf Use Motorized Sliding CD-Door, Upward Opening
Blue Backlit LCD Display
Blue LED Lighting CD-Door and Control Keys
2-Way Isolated Speaker System with Elegant Cloth Speaker Grills
Certified "Made for iPhone" by APPLE Apple® iPhone+iPod® Dock Built-In (Top Mounting)
Plays and Charges most iPods, iPod Touch and iPhone
FM Stereo Digital PLL Tuner with Station Memory Presets
CD-Audio Playback (CD-R Readable)
AUX (Line-In) Jack for External MP3 Player Connection
iPod/iPhone Video Out (RCA Jack)
Built-In. Wireless Credit-Card Type Remote Control
(Pyle Home) **PICD65I**



Enhanced iPod/iPhone Alarm Clock Speaker System W/ Am Fm Radio and Remote Control (Black)
Supports Most iPhone and iPod Models With Universal Dock Connector.
AUX Input to Plug in Any Other Audio Source.
Wake to iPhone/iPod or buzzer
AM/FM PLL Tuning with 20 Preset Memory Stations
iPod/iPhone 30 Pins Docking with Rechargeable Plug
Dual Alarm Clock Modes
Snooze/Dimmer, Volume Up/Down, Dst On/Off, Sleep Auto Power On/Off
Big LCD display, Aux input jack
DC jack Rear Input
Dual Stereo Speakers
Remote Control Included
Designed High-end Drivers Delivers Clarity, Depth and Power
(Pyle Home) **PICL45B**



iPhone/iPod FM Radio Receiver with CD Player & Alarm Clock
Top Loading CD Player
Compatible with CD/CD-R/CD-RW Discs
Play, Pause, Stop, Forward & Backward skip or search
Programmable CD Playback
Repeat 1/all Tracks
FM Stereo Radio
PLL Digital Tuning System
20 preset stations memory
LCD Display with Back-light
Compatible with iPhone 3GS & 4G, iPod 5G, iPod Mini, iPod Nano & iPod Touch (all Generations)
iPod Classic & iPod Video
Battery Charging after iPhone/iPod Unit Docked-in (available for all iPod Models with 30 pin connector port).
Clock Display
Dual Alarm Function Wake up by Buzzer. FM Radio or iPhone/iPod music. Full Function Remote Control
3.5mm AUX-IN Jack
(Pyle Home) **PICL48W**





USB Cable A-A
70-8116 6ft
70-8110 10ft



Cat5 Cable with Ends
72-5103 3ft
72-5110 10ft
72-5125 25ft
72-5150 50ft
72-5102 100ft



VGA Cables 15 Pin
M/M
70-5024 6ft
70-5026 10ft



USB A Male to
USB B Male
70-8123 3ft
70-8123 6ft
70-8135 15ft



TV HDMI to VGA
Cable
6'
HDMI VGA6



HDMI to DVI
Cable 10'
HDMI DVIO



High Density 15 pin
Female to Female
Gender Changer
70-318



USB A Female to A Female
Adapter
70-8005



AV Selector
3 Inputs 2 Ouputs
Audio Video Gold RCA
Jacks Slide Switch
AV31



screenPLAY - RCA Audio Video Cable
for MP3 6' Connect your iPod with
video (Gen 5) or Zune to any television
or stereo with RCA inputs Triple
shielded 75ohm video cable eliminates
video static for a high resolution picture
Braided dual axial twisted shielding
eliminates induced noise for better
sound quality Tapered metal RCA
barrels allow for better connection
without signal loss 6 foot cable
with non-tangling PVC jacket
I6CA35V Scosche



syncABLE - USB 2.0
cable for iPad, iPhone
and iPod Conveniently
charge and sync your
iPad, iPhone or iPod
USB 2.0 allows for high
speed data transfer
3.5 foot cable length
IPUSBK2 Scosche



controlFREQ - Wirless Car
& Sport RF Remote for iPod
Made for any iPod with dock
connector. Over 100 feet
wireless control. Control track
volume, play/pause, playlist
and shuffle Includes steering
wheel cradle, wrist strap and
an arm strap Features patented
pass-through for charging and syncing
iPod touch (1st and 2nd generation)
iPod classic iPod with video iPod nano
(1st,2nd,3rd,4th and 5th generation)
IPNRFCS Scosche



Scosche snapFIT Window and
Vent mount for iPod and iPhone
Adjustable mount is ideal for iPod, iPhone,
MP3, Blackberry and more
Includes vent and windshield mounting
options
360 degree swivel allows for vertical and
horizontal viewing angles
IPH3G



Audio/Video cable for iPad, iPhone and iPod
The sneakPEEK is an audio and video output solution +
for any iPad, iPhone & iPod that plays video, including,
iPad, iPhone 4, iPhone 3GS, iPhone 3G, iPhone, iPod
touch (Gen 1, 2, 3 and 4), iPod nano (Gen 3, 4, 5 and
6), iPod classic, iPod with video (Gen 5).
With the sneakPEEK you can easily connect your iPad, i
Phone or iPod directly to any television or stereo with
RCA audio/video inputs.
The tapered metal RCA barrels provide a superior
connection with no signal loss.
Integrated mini USB port allows you to charge while
you play (Mini USB cable not included)
Compatible with the following Apps: iPod video
playback, Photos, AirVideo, YouTube, Netflix (iPhone 4
and iPad) and Keynote
IPAV





klearCOAT - 2 Front & 1 Back Ultra-clear Protective Films for iPhone 4S and 4
Includes micro-fiber cleaning cloth
FPPUC



klearCOAT - Screen protectors for iPhone 3GS and iPhone 3G includes two 0.1mm anti-glare screen protectors. Satin finish maintains the optical clarity and brightness of the screen while reducing smudging and glare includes micro fiber cleaning cloth easy to apply
FPP2



powerFUZE - Dual 1A Home & Car USB Charging Kit. The powerFUZE is a home & car USB charging kit that is designed to offer several charging options in one sleek package. The dual 1 AMP charging circuitry ensures that your devices charge as quickly as possible.
HC12V



freqOUT - Digital FM Transmitter for iPod and iPhone. This digital FM transmitter plugs directly into the bottom dock of your iPod or iPhone to provide a clear and crisp audio signal. For devices without a 30-pin dock, use the included aux cable to plug directly into any headphone jack. The flex-neck design gives you the freedom to position the freqOUT at multiple viewing angles. Works With iPod touch (1st, 2nd, 3rd and 4th generation), iPod classic, iPod nano (1st, 2nd, 3rd, 4th, 5th and 6th generation), iPhone 4, iPhone 3GS, iPhone 3G and iPhone.
FMTD7



tuneIN - Universal FM transmitter Play your audio device through your car stereo. Easily change between 20 transmitting frequencies. Requires two AA batteries (not included). On/Off switch helps conserve battery life



Scosche reVamp iPhone iPod 12V Charger
Charges through your vehicles 12V power socket
Long and durable coil cord
LED power indicator
Charges any docking iPod or iPhone
IPCHRG2



clipSYNC - Keychain Charge & Sync Cable for Mini & Micro USB Devices The clipSYNC is the essential charge and sync cable for Android Devices, BlackBerry, Smartphones, Camera, Gaming Devices and more. The incredibly compact design allows you to always have your cable with you. Attach the clipSYNC almost anywhere with the built-in carabiner clip.
USBMM3